

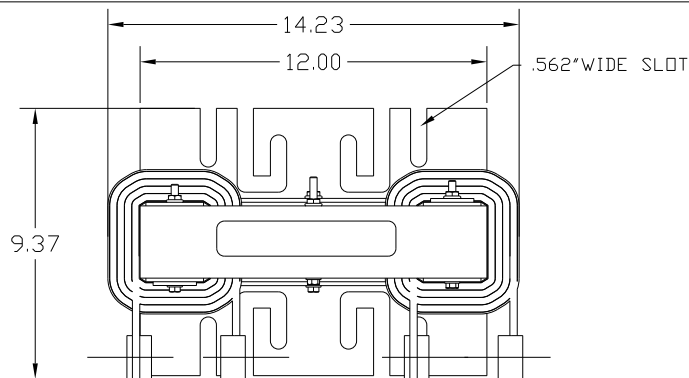
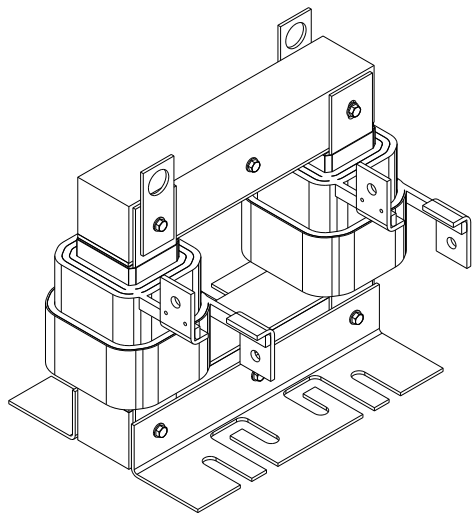


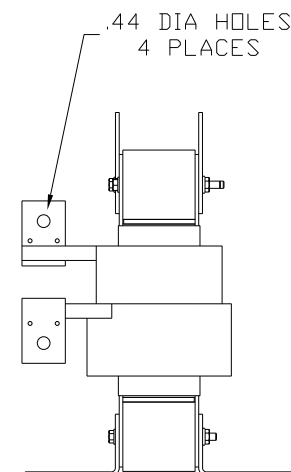


PART #	RATED AMPS	AMPS MAX	APPROX WT-LBS
--------	---------------	-------------	------------------

KDSL24B	260	260	112
---------	-----	-----	-----

TCI TRANS-COIL, INC. MILWAUKEE, WI WWW.transcoil.com 800-824-8282		PERFORMANCE AND PROTECTION FOR DRIVES KDR Drive Reactor CATALOG# MOTOR HP AMPS 1PH, 60Hz, 600V Max. A Max. 40C° Amb Max, 155C° Rise		C ₁ C ₂ C ₁ C ₂
DATE CODE				

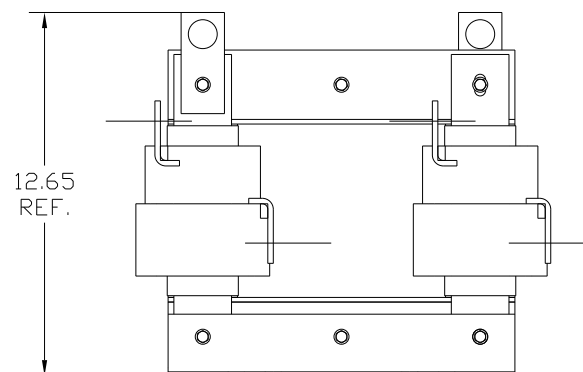

SUGGESTED 4.75" MOUNTING DISTANCE
 6.00 REF.
 4.85 REF.

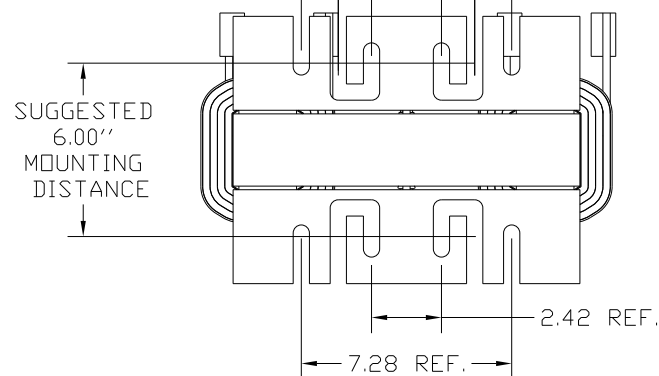

				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.03 .XXX ±.01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224 SINGLE PHASE LR. REACTOR 260A MAX , 240V (KDSL24B) DRN BY DSW DATE 12/09/10 DWG NO 104567DG SCALE TO FIT APPRVD C SHT.1 OF1	
NO	REVISION	DATE	BY				