

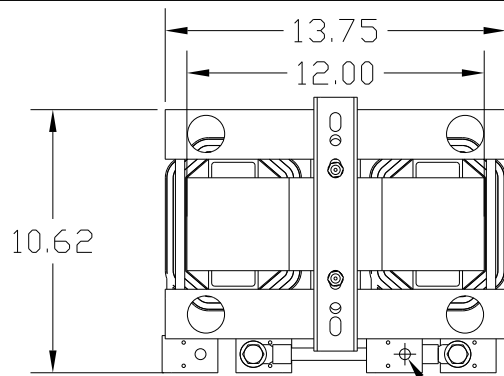
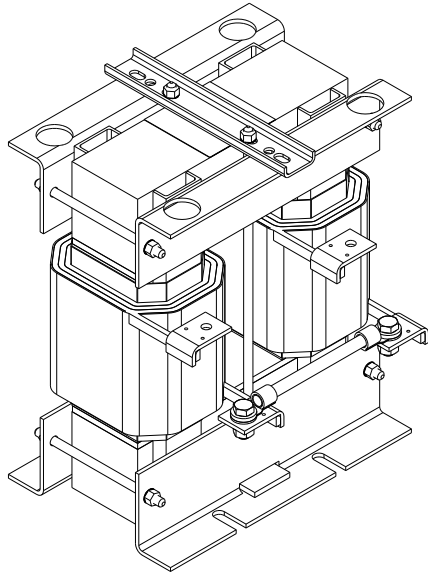


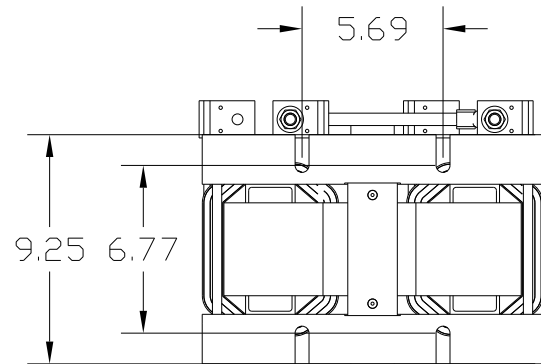

.44 DIA HOLE

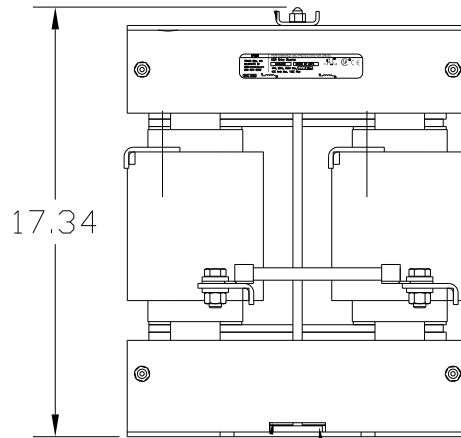

432A Filter

PART #	RATED AMPS	AMPS MAX	APPROX WT-LBS
--------	---------------	-------------	------------------

KDSX21J	235.9	235.9	235
---------	-------	-------	-----

PERFORMANCE AND PROTECTION FOR DRIVES.

KDR Drive Reactor

CATALOG# MOTOR HP AMPS

1PH, 60Hz, 600V Max, --- A Max.


40C Amb Max, 155C Rise

DATE CODE

AI AZ

CI CE

UL US CSA CE

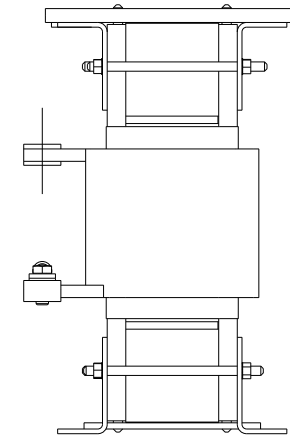

					TOLERANCES (EXCEPT AS NOTED):		 7878 N. 86th STREET MILWAUKEE, WI 53224	
					DECIMAL		KDSX21J 235.9A 240V	
					.XX ± .03			
					.XXX± .01			
					FRACTIONAL			
					± 1/32			
					ANGULAR		DRN. BY DSW DATE 12/13/10 DWG. NO. 104570DG	
NO	REVISION	DATE	BY		± 1/2°		SCALE TO FIT APRV. C SHT. 1 OF 1	