

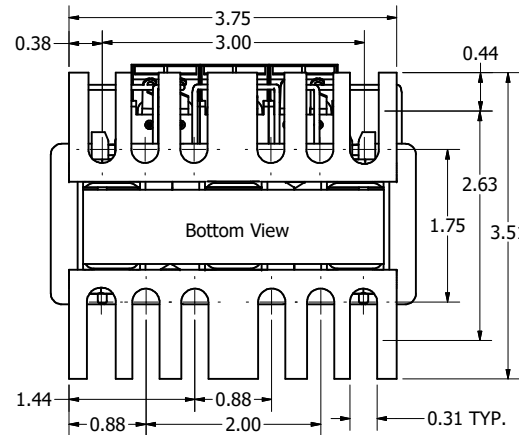
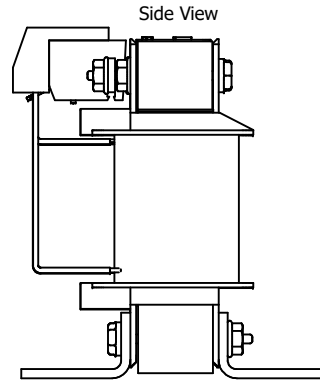
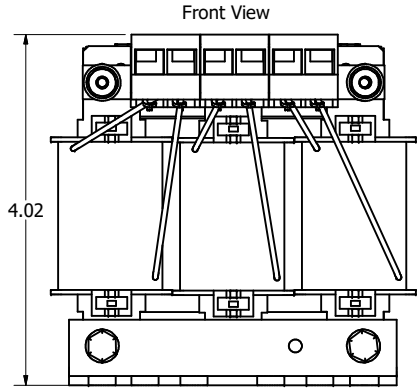


(Customer Connections)
Markings On Terminal Block
For Reference Only. Wire Range: 18-12 AWG.
Torque : 10 IN-LBS (1.1 Nm)

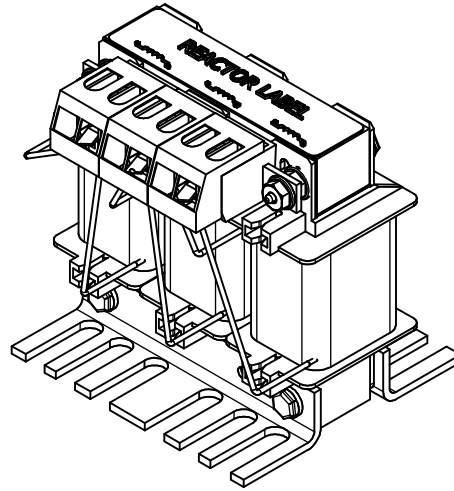

* For single phase applications, use coils A and C, Isolate terminals B1 and B2.

2	1	1	1	1
Catalog Part Number	---mH +/-10%	---Amps (A)	Approx Weight (LBS)	Torque (LB-IN)
KLR2ATB	11.03	2	4	10
KLR2BTB	5.51	2	4	10
KLR2CTB	18.38	2	4	10
KLR2DTB	13.21	2	4	10
KLR2ETB	22.02	2	4	10
KLR2FTB	6.60	2	4	10
KLR3ATB	7.35	3	4	10
KLR3BTB	3.68	3	4	10
KLR3CTB	12.25	3	4	10
KLR3DTB	8.81	3	4	10
KLR3ETB	14.70	3	5	10
KLR3FTB	4.40	3	4	10
KLR4ATB	5.51	4	4	10
KLR4BTB	2.76	4	4	10
KLR4CTB	9.19	4	5	10
KLR4DTB	6.61	4	5	10
KLR4ETB	11.00	4	5	10
KLR4FTB	3.30	4	4	10
KLR6ATB	3.68	6	5	10
KLR6BTB	1.84	6	4	10
KLR6DTB	4.40	6	4	10
KLR6FTB	2.20	6	4	10
KLR8ATB	2.76	8	5	10
KLR8BTB	1.38	8	4	10
KLR8FTB	1.65	8	4	10
KLR12BTB	0.919	8	4	10
KLR12FTB	1.10	8	4	10

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		 W132N10611 (Rev 13 Feb) Germantown, WI 53022 © 2022 TCI, LLC An Allied Motion Company Sine Guard Inductor KLR, TB'S (Frame A)	
N	6090, Update Drawing To Inventor	11/07/2022	DSW	DATE: 05/08/1992		KLR-18DG	
M	2235, Mounting Change	6/02/2003	DSW	SCALE: 1:1		SHT 1 OF 1	
NO	REVISION	DATE	BY				