
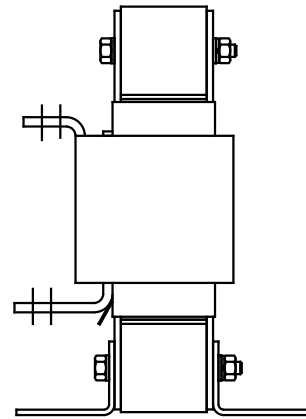


CATALOG NO	VOLTS<V.>	__mH±10%	__AMPS(A)	APPROX WT-LBS	TERMINAL-HOLE DIA
KLR110ACB	14.40	.200	110	49	.28 DIA HOLE
KLR110DCB	17.25	.240	110	47	.34 DIA HOLE
KLR130DCB	17.25	.203	130	47	.28 DIA HOLE
KLR160BCB	7.20	.069	160	47	.34 DIA HOLE
KLR160DCB	17.25	.165	160	47	.34 DIA HOLE
KLR160FCB	8.62	.083	160	47	.34 DIA HOLE

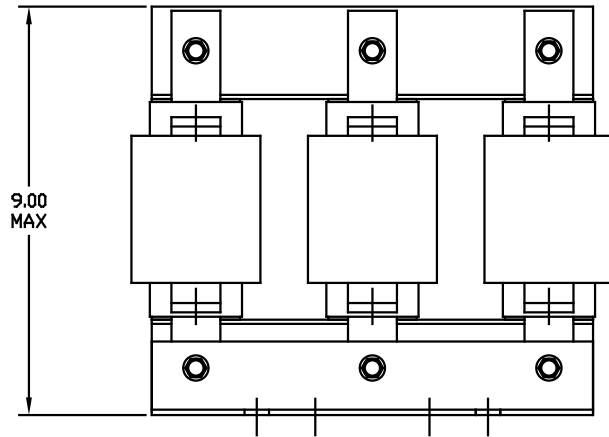


TCI Performance and Protection for Drives.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

KLR Series Line Reactor
CATALOG# _____
3PH, 60Hz, 600V Max, _____ Amps
40C Amb Max, 115C Rise

UL US SA CE

LINE COIL A1 A2 B1 B2 C1 C2

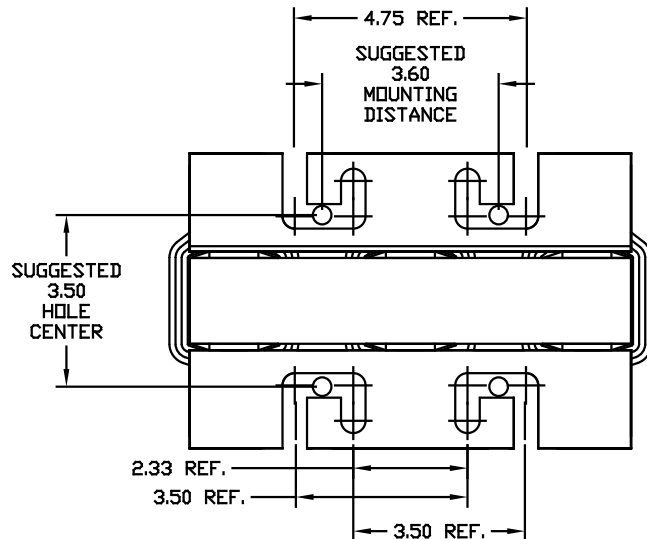

HI-POT VOLT	VAC
2650	468-2

				TOLERANCES EXCEPT AS NOTED:		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				XX ±.03		SINE-GUARD REACTOR KLR CB'S (FRAME I)	
				XXX±.01			
				FRACTIONAL ± 1/32			
ID 2235, MOUNTING CHG	06/03/03	DSW		ANGULAR ± 1/2°	DRG BY BW	DATE 03/06/98	DRG. NO. C KLR-25DG
NO	REVISION	DATE	BY		SCALE 1/2"=1"	APPROVA	SHT. 1 OF 1