

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLR850BCB	7.20	.013	850	156
KLR950BCB	7.20	.012	950	160

TCI

Performance and Protection for Drives.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

KLR Series Line Reactor

CATALOG# []

3PH, 60Hz, 600V Max, [] Amps



40C Amb Max, 15SC Rise

A1 A2



B1 B2

C1 C2

.53 DIA HOLE
(6 PLACES)

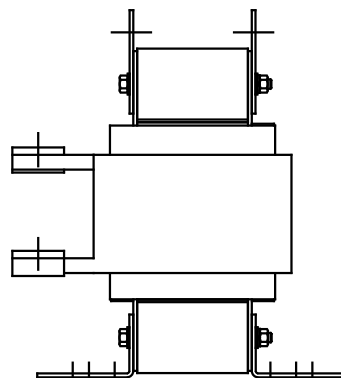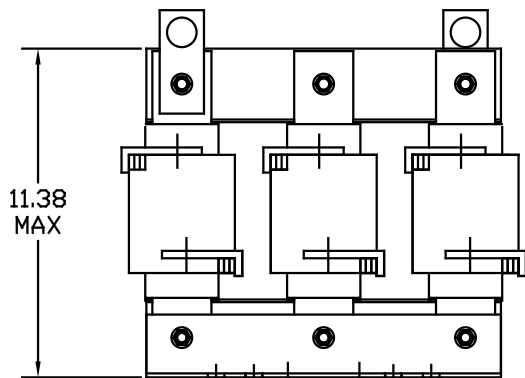

SUGGESTED 4.75"
MOUNTING DISTANCE

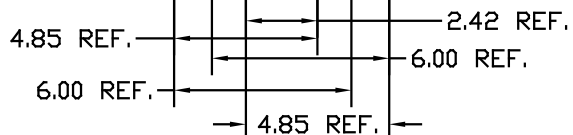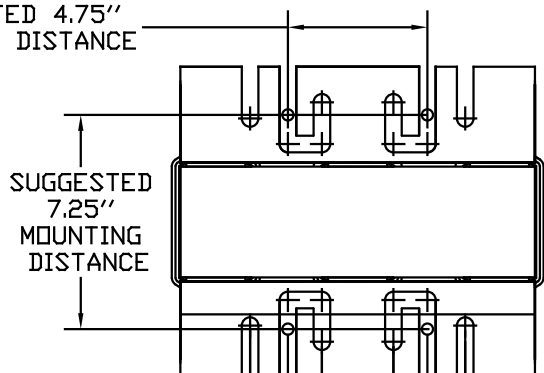

				TOLERANCES EXCEPT AS NOTED:	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL .XX ±.03 .XXX±.01 FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	SINE-GUARD REACTOR KLR CB'S (FRAME S)
NO	REVISION	DATE	BY	SCALE TO FIT	
2235	MOUNTING CHG	06/06/03	DSW	DATE 01/24/02	DRAWN BY DSW KLR-54DG SHT. 1 OF 1