480 Rated Voltage, 600 Max Voltage				
KLR Part Number	Horsepower (HP)	---mH +/-10%	Amps (A)	Approx Weight (LBS)
KLR35CTB	25	1.05	35	22
KLR45CTB	30	0.817	45	24

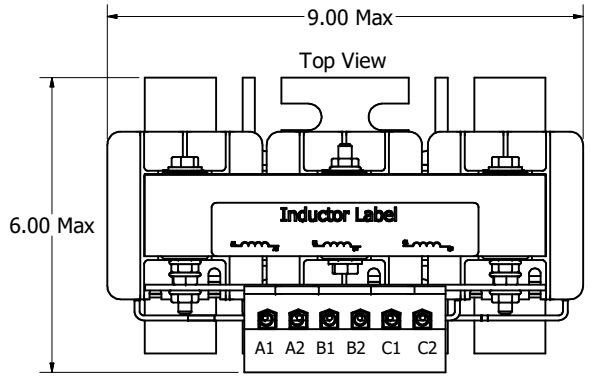

(Customer Connections)
Markings On Terminal Block
For Reference Only.

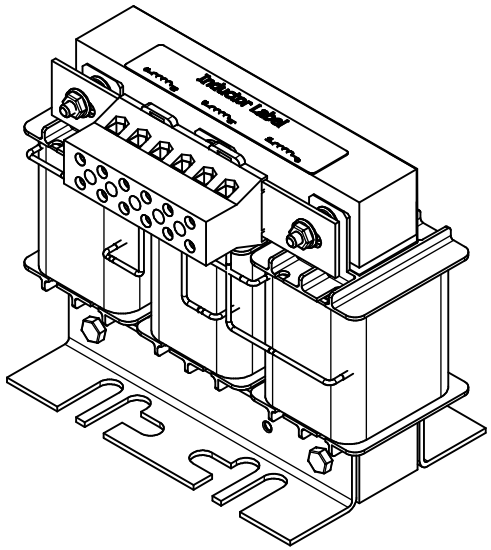

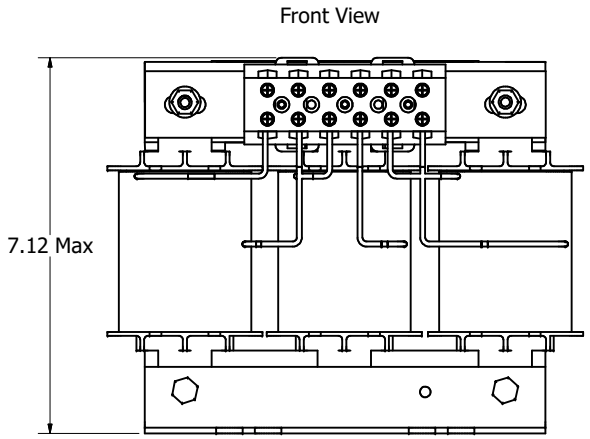

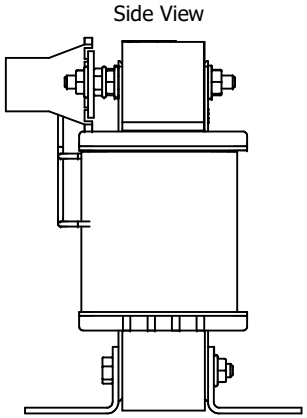

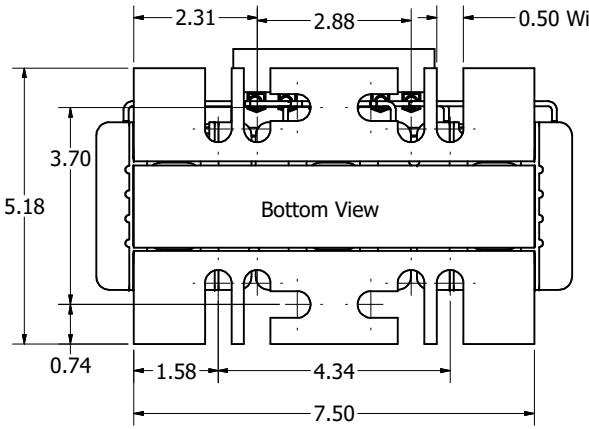



Customer Is Responsible For Installation
To Meet All NationalAnd Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.					DRN. BY	DSW	Allient Power	W132N10611 Grant Drive Germantown, WI 53022 © 2025 Allient Inc.
TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°						DATE	12/19/25		
								KLR-Three-Phase Inductor Frame F	
		P	7321	KLR-7 to KLR7-1, Match Revs	12/19/25	DSW	SCALE: 1:1.8	DRN. NO. KLR-7-1DG	SIZE C SHT.1 OF 1
		NO	ECO	REVISION	DATE	BY			