

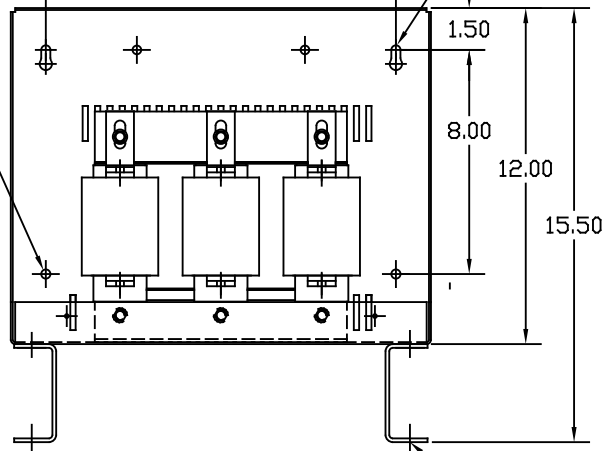
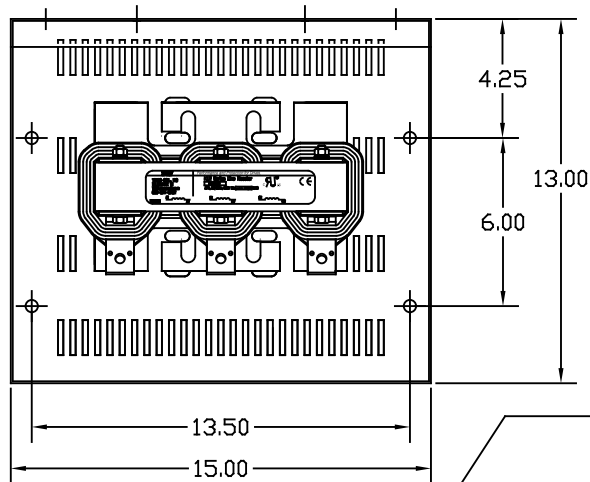
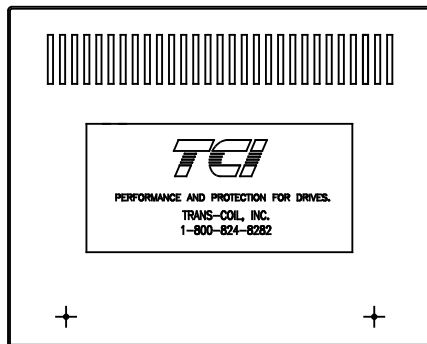


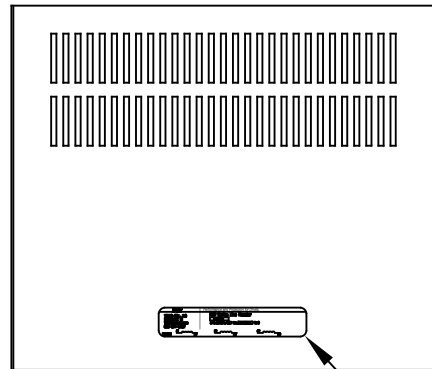


.328 DIA.  
2 HOLES

KEYSLOTS FOR  
1/4-20 SCREWS  
2 PLACES

.44 DIA.  
4 MTG. HOLES

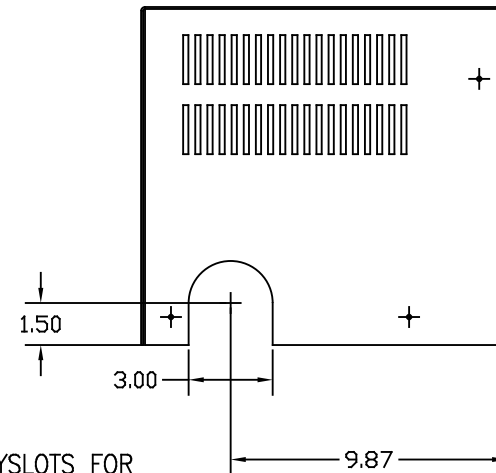

COVER IN  
PLACE

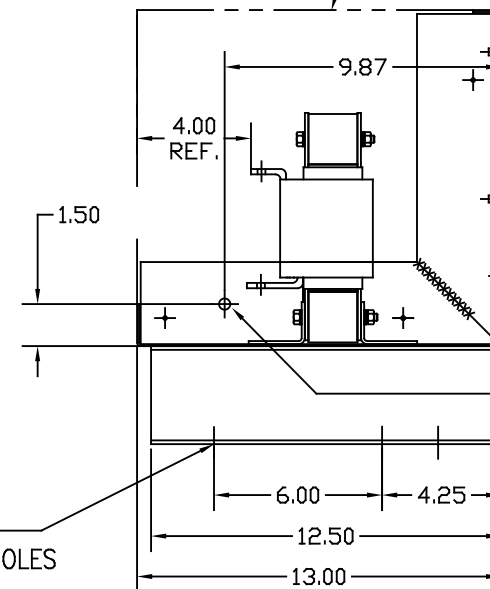

LOCATION FOR  
CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

| 690V | NEC<br>MOTOR<br>HP | CATALOG NO  | __AMPS(A) | APPROX WT-LBS | WATTS<br>LOSS | TERMINAL RING<br>HOLE SIZE |
|------|--------------------|-------------|-----------|---------------|---------------|----------------------------|
| 3% Z | 100                | KLR110DCB4V | 110       | 84            | 217           | .34 DIA HOLE               |

| TOLERANCES<br>(EXCEPT AS NOTED) |                      |      |    | TCI 7878 N. 86th STREET<br>MILWAUKEE, WI 53224     |        |        |          |
|---------------------------------|----------------------|------|----|----------------------------------------------------|--------|--------|----------|
| DECIMAL                         |                      |      |    | KLR SERIES 3 PH REACTOR<br>690V (FRAME I) ENCLOSED |        |        |          |
|                                 | .XX ± .03            |      |    | DRN BY                                             | DSW    | DATE   | 03/30/07 |
|                                 | .XXX ± .010          |      |    | SCALE                                              | TO FIT | APPR'D |          |
|                                 | FRACTIONAL<br>± 1/16 |      |    | KLR110DCB4VDG                                      |        |        |          |
|                                 | ANGULAR<br>± 1/2°    |      |    | SHT. 1 OF 1                                        |        |        |          |
| NO                              | REVISION             | DATE | BY |                                                    |        |        |          |