
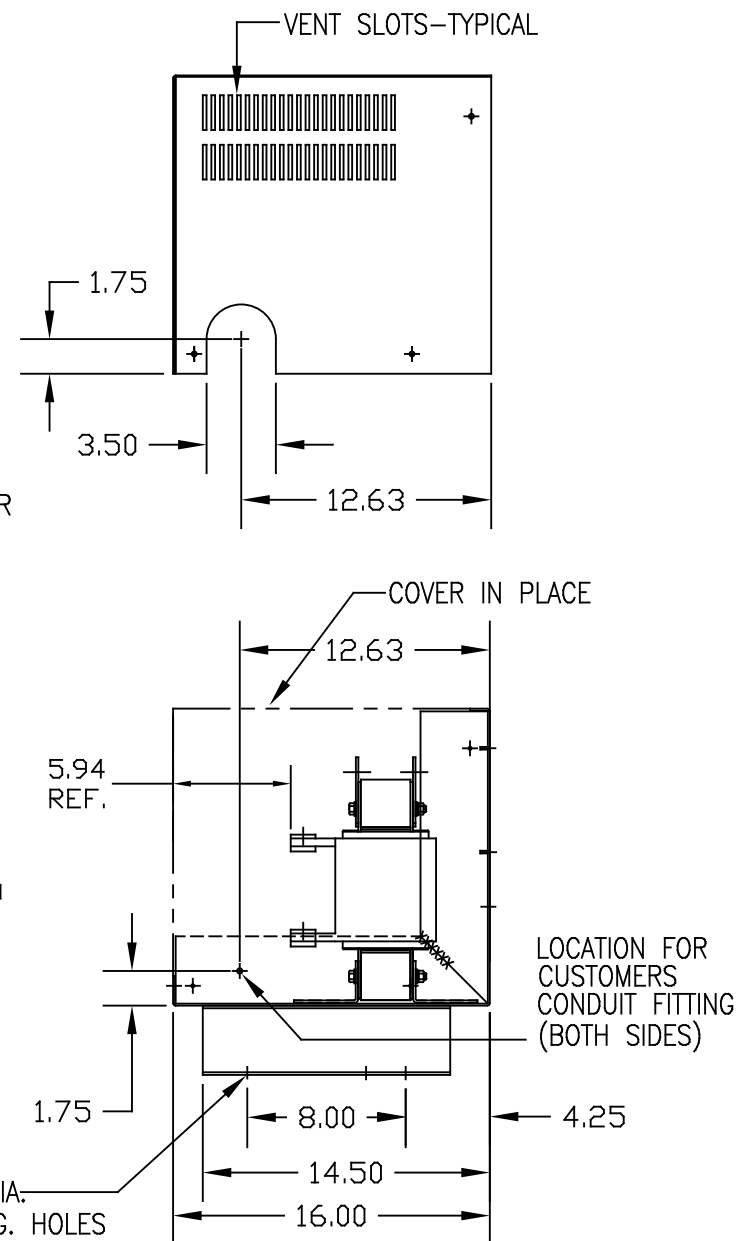


.328 DIA.  
2 HOLES

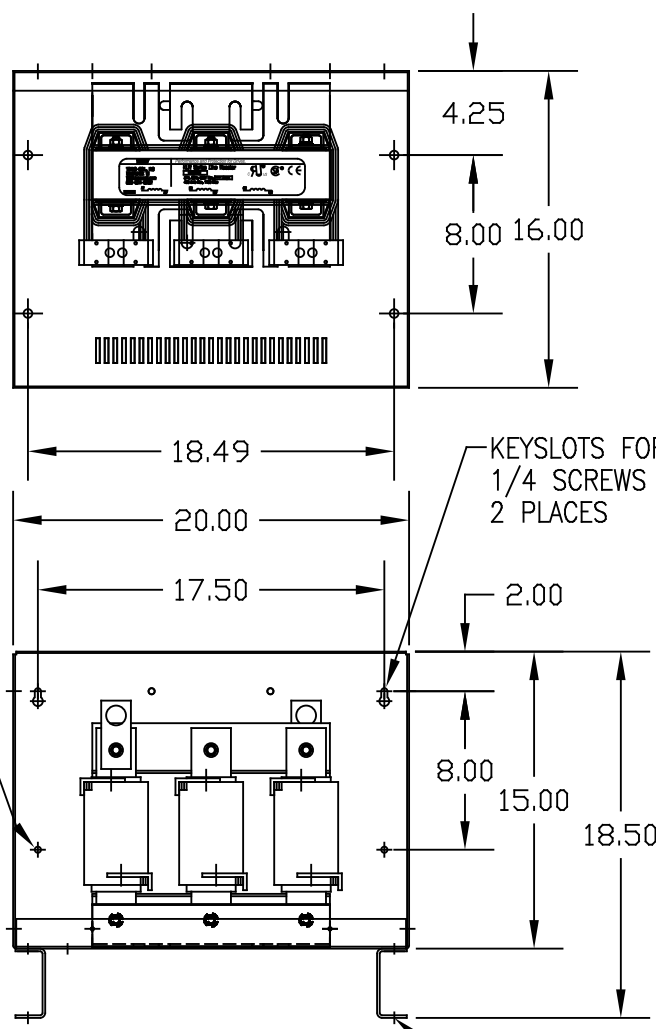

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS	TERMINAL HOLE SIZE
5% Z	250	KLR250ECB5V	250	165	375	.44

TOLERANCES EXCEPT AS NOTED			7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL	.XX ±.03	.XXX ±.010	
FRACTIONAL	± 1/16		KLR SERIES 3 PH REACTOR 690V (FRAME L) ENCLOSED
ANGULAR	± 1/2°		
NO	REVISION	DATE	BY
DRAWN BY DSW			DATE 03/30/07
SCALE TO FIT			APPROVED [Signature]
			DWG. NO. KLR250ECB5VDG
			SHT. 1 OF 1