
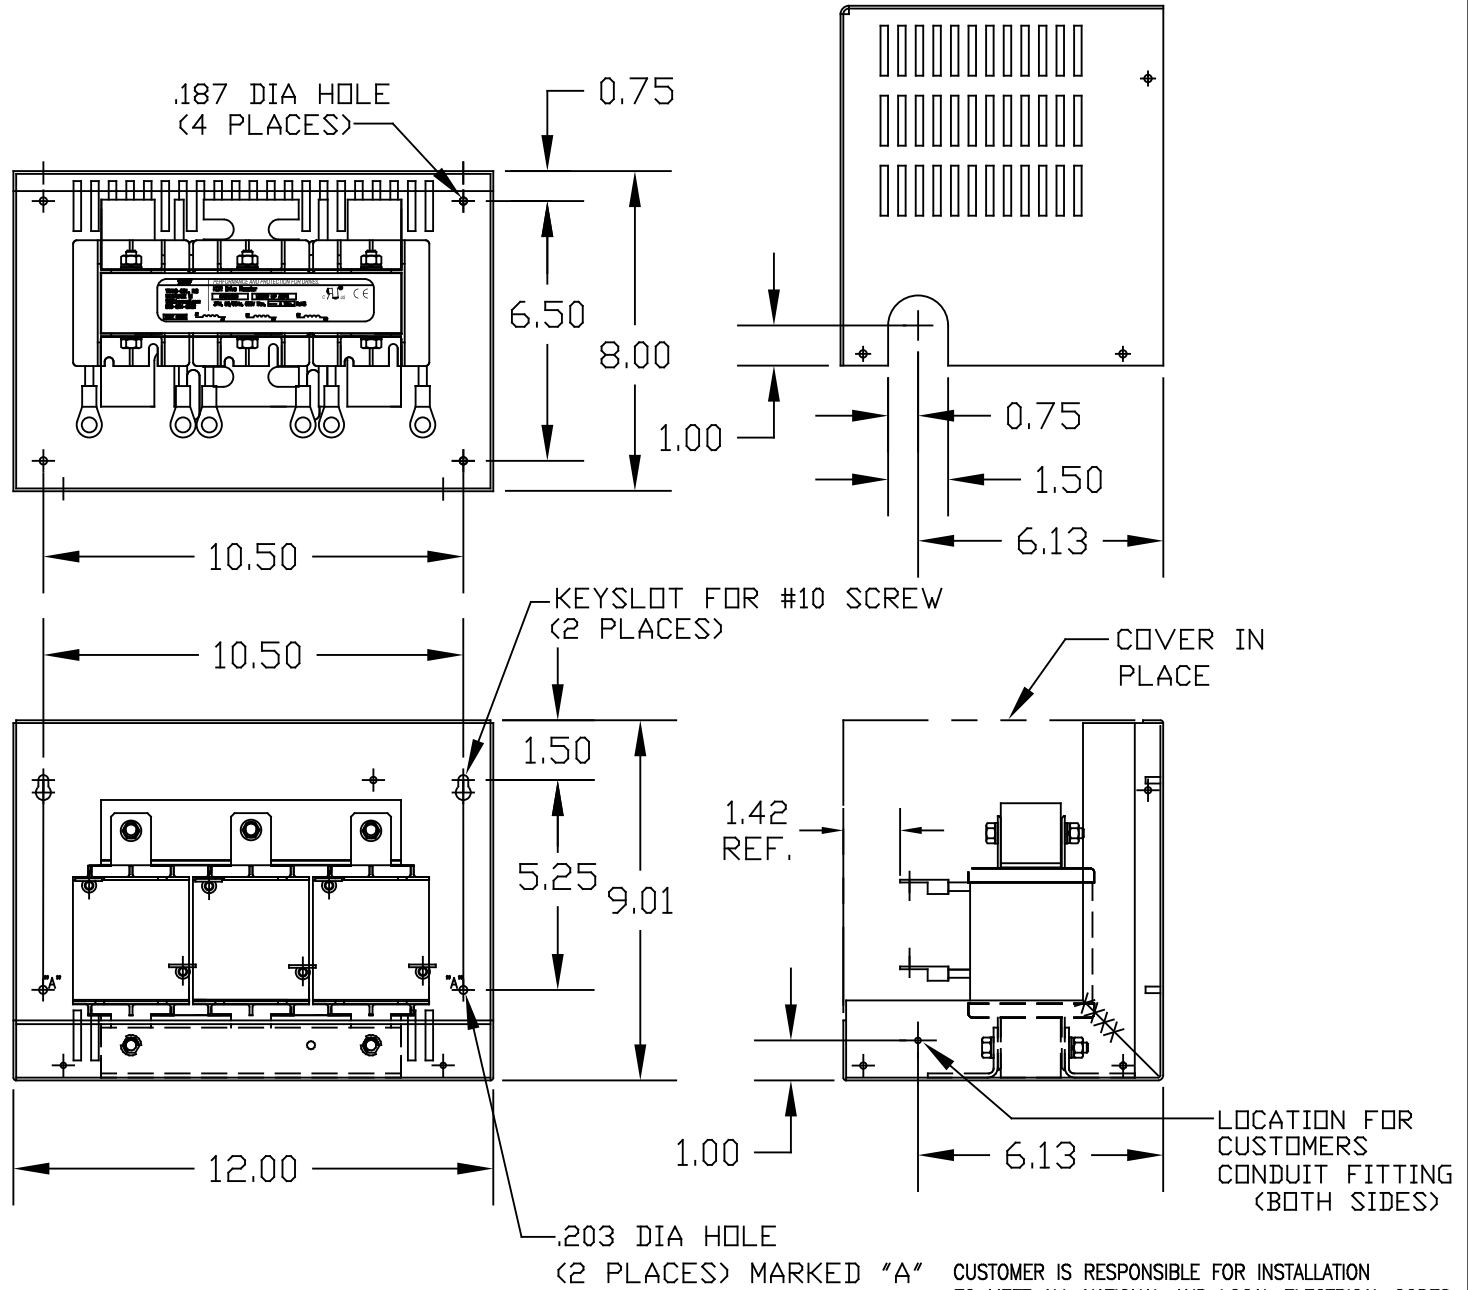
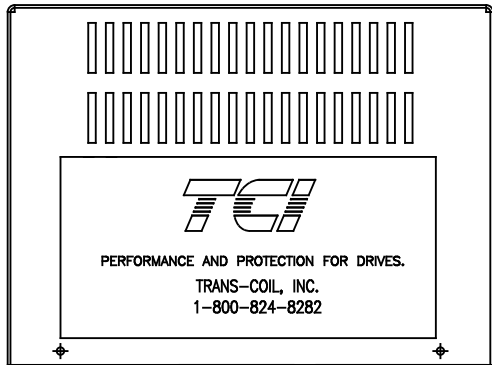


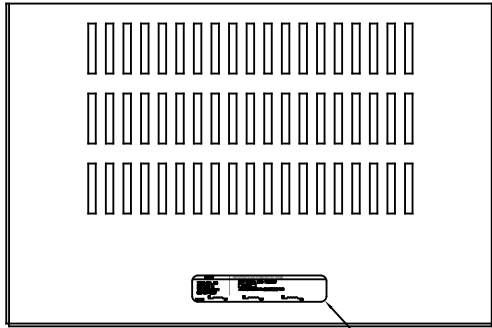

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS	TERMINAL RING HOLE SIZE
5% Z	25	KLR27ERL3V	27	29	94	.25 DIA HOLE

TOLERANCES EXCEPT AS NOTED				7878 N. 86th STREET MILWAUKEE, WI 53224			
DECIMAL	.XX ± .03	.XXX ± .010	FRACTIONAL ± 1/16	DRN BY	DATE	DATE	DATE
ANGULAR	± 1/2°			DSW	03/30/07		
NO	REVISION	DATE	BY	SCALE	TO FIT	APPROV	APPROV

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KLR SERIES 3 PH REACTOR 690V (FRAME F) ENCLOSED

DRN BY DSW DATE 03/30/07 DATE 03/30/07 DATE 03/30/07

SCALE TO FIT APPROV APPROV

KLR27ERL3VDG SHT.1 OF1