

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS
5% Z	3	KLR4EQDDR	4	5	27

**TCI** Performance and Protection for Drives.


TRANS-COIL, INC  
MILWAUKEE WI  
WWW.transcoil.com  
800-824-8282

**KLR Series Line Reactor**  
CATALOG# \_\_\_\_\_  
3PH, 50/60Hz, 690V Max, \_\_\_\_\_ Amps RoHS


DATE 0000 A1 A2 B1 B2 C1 C2

UL US CE

NOTE: CUSTOMER CAN CHANGE MOUNTED REACTOR, FROM VERTICAL TO HORIZONTAL ON DIN BRACKET.

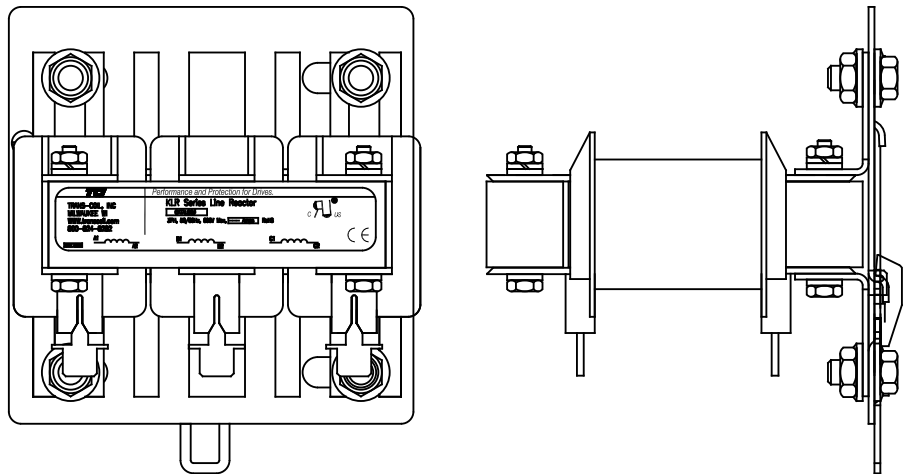

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD 35mm DIN RAIL. TCI'S MINIMUM RECOMMENDATION IS TO USE: HIGH PROFILE STANDARD 35mm STEEL RAIL OR HEAVY DUTY STANDARD 35mm STEEL RAIL.

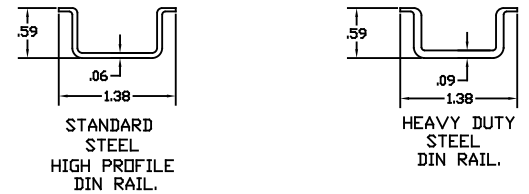

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING MOUNTED REACTORS.

				7878 N. 86th STREET MILWAUKEE, WI 53224	
				<b>KLR DIN RAIL 690V (FRAME A)</b>	
TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.03 .XXX±.010 FRACTIONAL ± 1/16 ANGULAR ± 1/2°		DRN BY DSW SCALE TO FIT	DATE 03/06/07 APRVL	DWG NO. C KLR4EQDDRVDG	SHT.1 OF1
NO	REVISION	DATE	BY		