

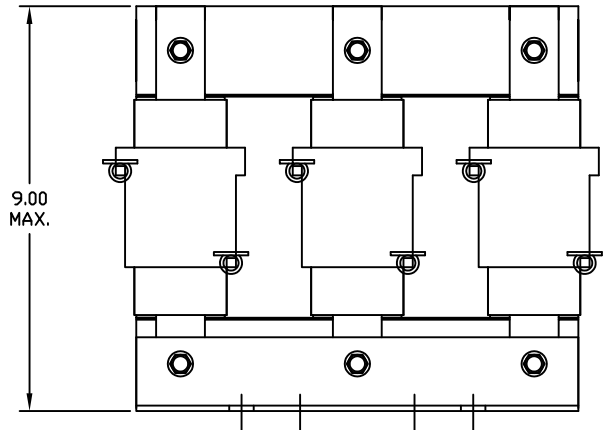
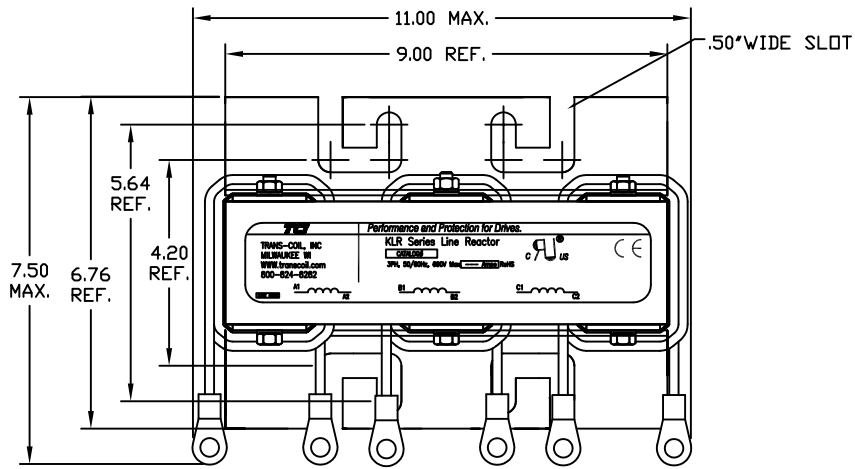
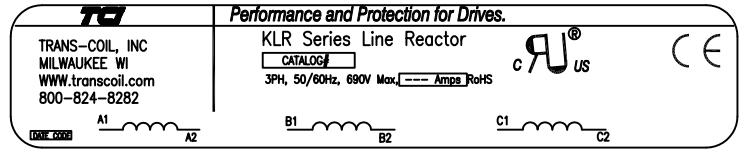


| | | | | | | |
|------|--------------|------------|-----------|---------------|------------|-------------------------|
| 690V | NEC MOTOR HP | CATALOG NO | __AMPS(A) | APPROX WT-LBS | WATTS LOSS | TERMINAL RING HOLE SIZE |
| 5% Z | 50 | KLR55ERLV | 55 | 33 | 132 | .38 DIA HOLE |

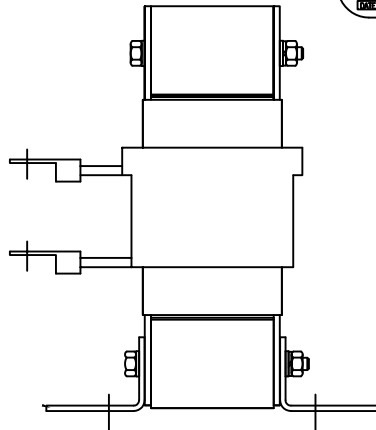

SUGGESTED
3.60
MOUNTING
DISTANCE

3.50 REF. 3.50 REF.

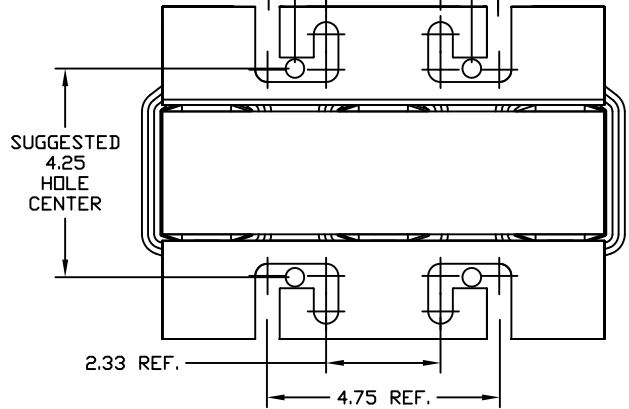

| | | | | | | |
|--|--|--|--|---------------------------------|--|---|
| | | | | TOLERANCES (EXCEPT AS NOTED) | | 7878 N. 86th STREET MILWAUKEE, WI 53224 KLR SERIES 3 PH REACTORS 690V (FRAME G) |
| | | | | DECIMAL | | |
| | | | | .XX ± .03 .XXX ± .010 | | |
| | | | | FRACTIONAL ± 1/16 | | |
| | | | | ANGULAR ± 1/2° | | DRN BY DSW DATE 02/07/06 DWG. NO. C SCALE TO FIT APRVD. KLR55ERLV DG NO. REVISION DATE BY SHT. 1 OF 1 |