


KEYSLOTS FOR 1/4-20 SCREWS 2 PLACES
COVER IN PLACE

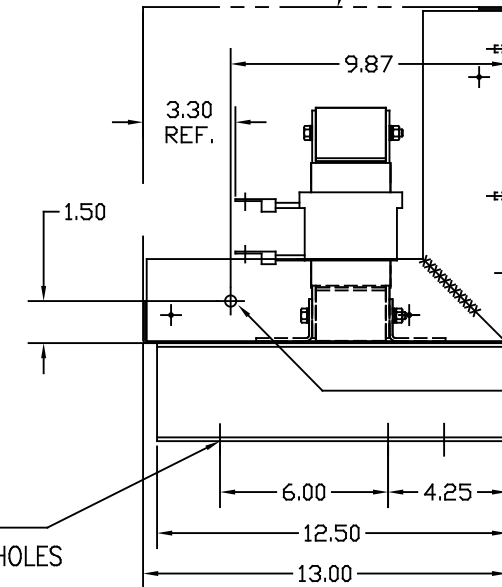

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

.328 DIA. 2 HOLES

.44 DIA. 4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS	TERMINAL RING HOLE SIZE
3% Z	60-75	KLR80DRL4V	80	84	116	.38 DIA HOLE

TOLERANCES EXCEPT AS NOTED		
DECIMAL	.XX ±.03	.XXX ±.010
FRACTIONAL	± 1/16	
ANGULAR	± 1/2°	
NO	REVISION	DATE BY

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KLR SERIES 3 PH REACTOR 690V (FRAME G) ENCLOSED

DRN BY DSW DATE 03/30/07 DWG NO. KLR80DRL4V/DG
SCALE TO FIT APPR'D C SH.1 OF1