

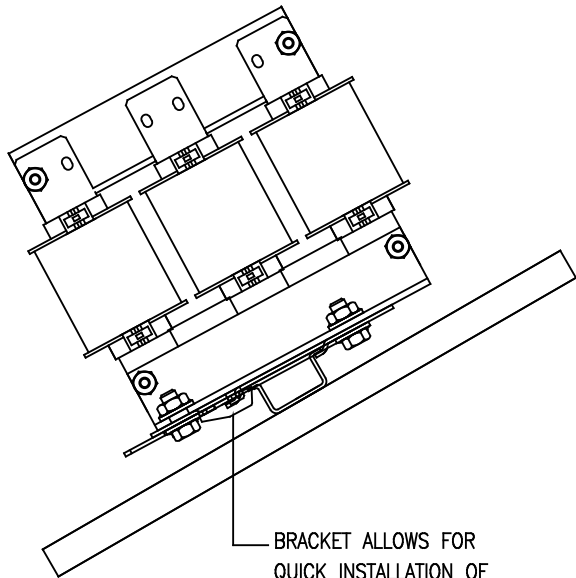


690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS
3% Z	5	KLR8DQDDRV	8	7	28

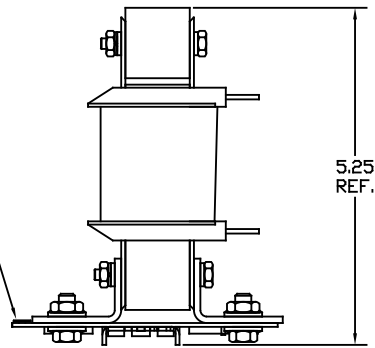


BRACKET ALLOWS FOR QUICK INSTALLATION OF REACTOR ON DIN RAIL.

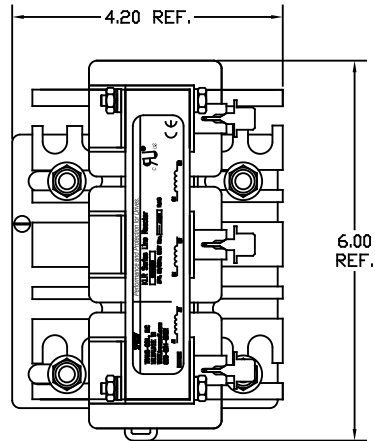


6-32 SET SCREW. SCREW MUST BE FLUSH WITH BOTTOM PLATE.

TCI TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282	Performance and Protection for Drives.		
	KLR Series Line Reactor 690V/50Hz	3PH, 50/60Hz, 600V Max. Partis	

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD SIZE DIN RAIL. TCI RECOMMENDS USING HIGH PROFILE STANDARD STEEL RAIL OR HEAVY DUTY STANDARD STEEL DIN RAIL.



STANDARD STEEL HIGH PROFILE DIN RAIL.



HEAVY DUTY STANDARD STEEL DIN RAIL.

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING MOUNTED REACTORS.

				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224		
				DIN RAIL REACTORS 690V (FRAME B)		
				TOLERANCES UNLESS AS NOTED: .XX ± .03 .XXX ± .01 FRACTIONS ± 1/32 ANGLES ± 1/2°	DESIGNED BY JDSV TO FIT	DATE 03/06/07
NO	REVISION	DATE	BY	APPROVED BY	PART NO. KLR8DQDDRV0G SHEET 1 OF 1	