

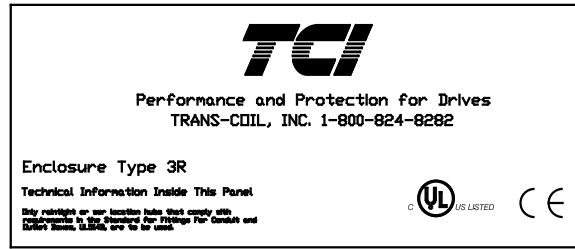
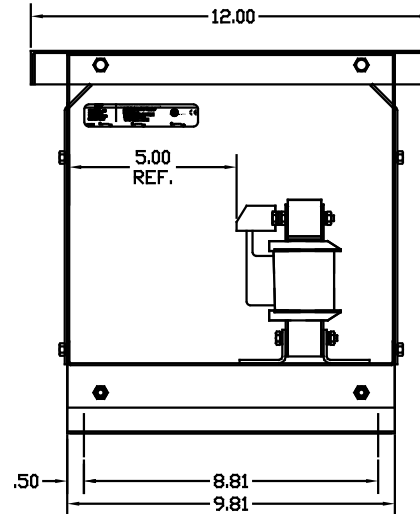


LABEL PLACED ON INSIDE WALL OF CABINET.

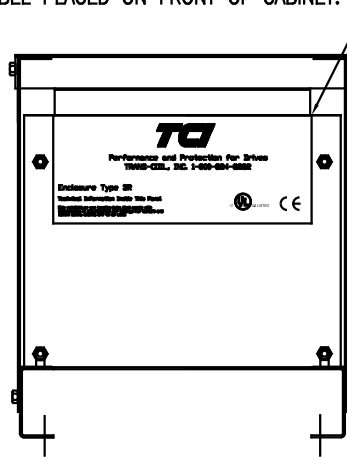


LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL6CTBE3R	24.00	6.13	6	22
KLRUL6ETBE3R	28.75	7.34	6	22
KLRUL8CTBE3R	24.0	4.59	8	22
KLRUL8DTBE3R	17.25	3.30	8	22
KLRUL8ETBE3R	28.75	5.50	8	22
KLRUL12ATBE3R	14.4	1.84	12	22
KLRUL12CTBE3R	24.0	3.063	12	23
KLRUL12DTBE3R	17.25	2.20	12	22

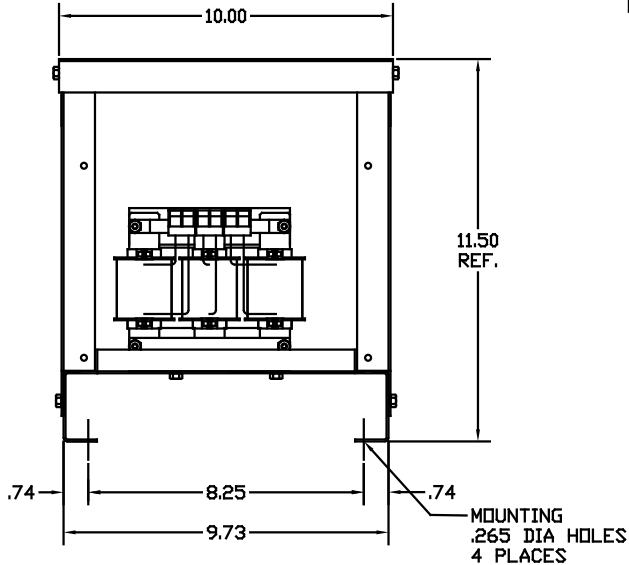

BLOCK WIRE RANGE #12-#18 AWG
FOR REACTOR AND
TIGHTENING TORQUE. 10 LB-IN



TERMINAL BLK MARKING

NOTE: A1, A2, B1, B2, C1, C2,
MAKING'S ON TERMINAL BLOCK
FOR REFERENCE ONLY.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FINISH:
VENDOR - LILLY POWDER COATINGS, INC.
PRODUCT CODE - 312E
COLOR - PEBBLE GRAY
POWDER TYPE - POLYESTER-POLYURETHANE
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	DRN BY	DATE	APPRV	DWG NO	DESCRIPTION
				DECIMAL .XX ± .03 .XXX ± .01	DSW	10/05/04		B	KLRBE3R-2DG
				FRACTIONAL ± 1/32	SCALE	TO FIT			SHT.1 of 1
				ANGULAR ± 1/2°					

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KLRUL, TYPE 3R, FRAME B