



LABEL PLACED ON INSIDE WALL OF CABINET.

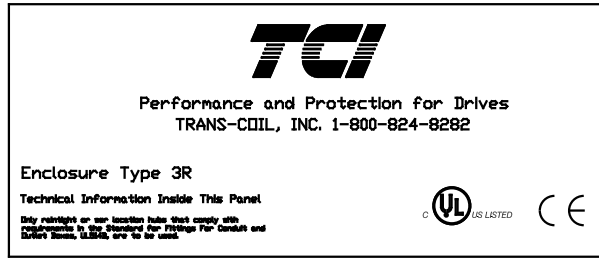



LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH ±10%	__AMPS(A)	APPRX WT-LBS
KLRUL18BTBE3R	7.20	.620	18	25
KLRUL18FTBE3R	8.62	.734	18	25
KLRUL21BTBE3R	7.20	.525	21	25
KLRUL21FTBE3R	8.62	.629	21	25
KLRUL25BTBE3R	7.20	.441	25	25
KLRUL25FTBE3R	8.62	.528	25	25
KLRUL27BTBE3R	7.20	.408	27	25
KLRUL27FTBE3R	8.62	.489	27	25
KLRUL35BTBE3R	7.20	.315	35	26
KLRUL35FTBE3R	8.62	.377	35	26
KLRUL45BTBE3R	7.20	.245	45	26
KLRUL45FTBE3R	8.62	.294	45	26

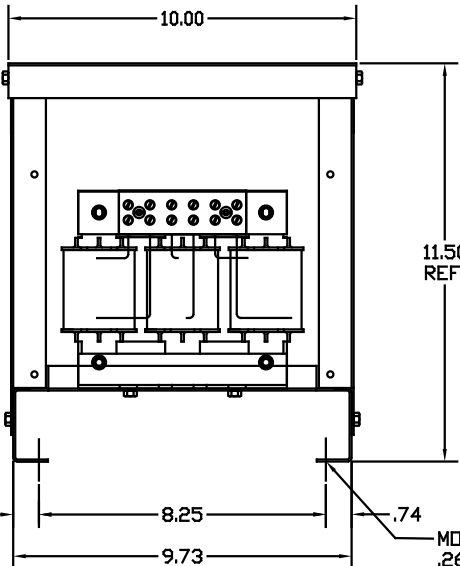

11.50 REF.

MOUNTING
.265 DIA HOLES
4 PLACES

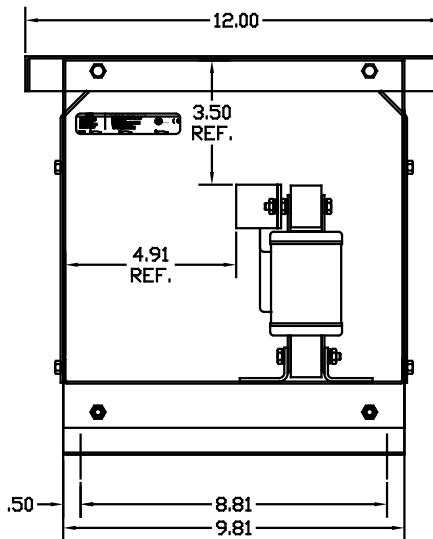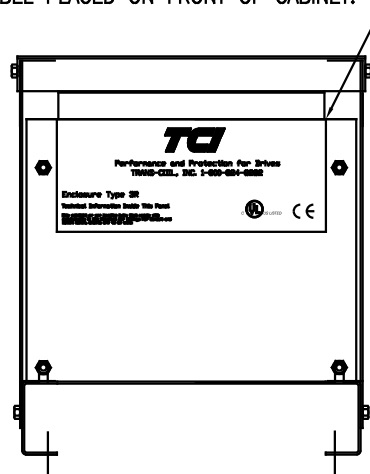

BLOCK WIRE RANGE #18-#4 AWG
FOR REACTOR AND TIGHTENING TORQUE. 20 LB-IN



TERMINAL BLK MARKING

NOTE: A1, A2, B1, B2, C1, C2, MAKING'S ON TERMINAL BLOCK FOR REFERENCE ONLY.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FINISH:
VENDOR - LILLY POWDER COATINGS, INC.
PRODUCT CODE - 312E
COLOR - PEBBLE GRAY
POWDER TYPE - POLYESTER-POLYURETHANE
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 8788 N. 86th STREET
MILWAUKEE, WI 53224

KLRUL, TYPE 3R, FRAME D

DRN BY DSW DATE 10/01/04 DWG NO. B KLRDE3R-1DG
SCALE TO FIT APPRVD. SHT. 1 of 1