



LABEL PLACED ON INSIDE WALL OF CABINET.




LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V,)	mH-±10%	AMPS(A)	APPROX WT-LBS
KLRUL25ETBE3R	28.75	1.76	25	61
KLRUL27ETBE3R	28.75	1.63	27	61
KLRUL35CTBE3R	24.00	1.05	35	61
KLRUL35ETBE3R	28.75	1.258	35	61
KLRUL45CTBE3R	24.00	.817	45	64
KLRUL45DTBE3R	17.25	.587	45	64
KLRUL55ATBE3R	14.40	.401	55	62
KLRUL55DTBE3R	17.25	.480	55	62
KLRUL80BTBE3R	7.20	.138	80	61
KLRUL80FTBE3R	8.62	.165	80	61

TORQUE(LB-IN)=CUSTOMER WIRE
35=1 AWG THRU 4 AWG
30=6 AWG THRU 14 AWG
25=16 AWG THRU 22 AWG

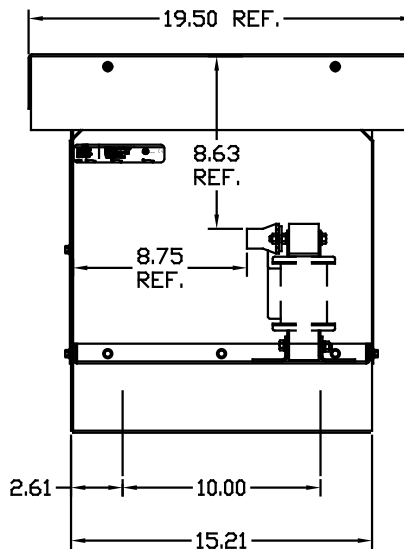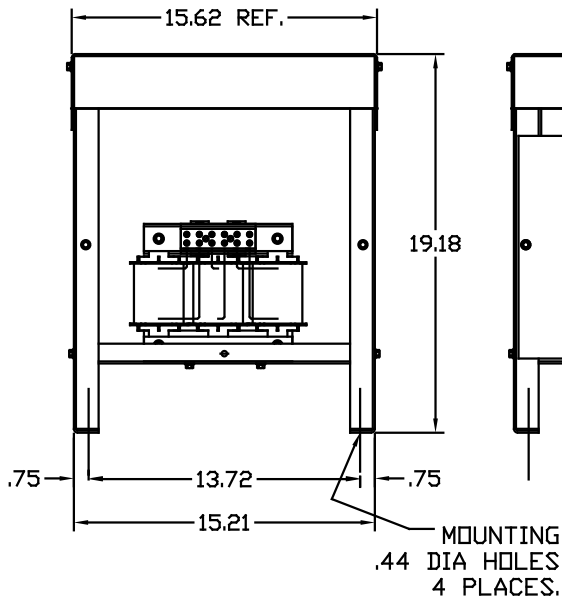

NOTE: A1, A2, B1, B2, C1, C2.
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.



TERMINAL BLK MARKING

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FINISH:
VENDOR - LILLY POWDER COATINGS, INC.
PRODUCT CODE - 312E
COLOR - PEBBLE GRAY
POWDER TYPE - POLYESTER-POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224 KLRUL, TYPE 3R, FRAME F	DRN BY	DATE	DWG NO
				DECIMAL		DSW	10/01/04	B
				.XX ± .03		SCALE	TO FIT	APPRV.
				.XXX ± .01				
				FRACTIONAL				
				± 1/32				
				ANGULAR				
				± 1/2°				

SHT.1 of 1