

15.62 REF.

19.18


.75

13.72


.75

15.21



MOUNTING HOLES
.44 DIA
4 PLACES.



LABEL PLACED ON INSIDE WALL OF CABINET.

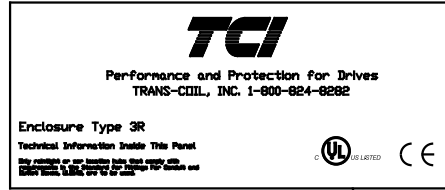

LABEL PLACED ON FRONT OF CABINET.

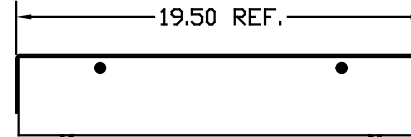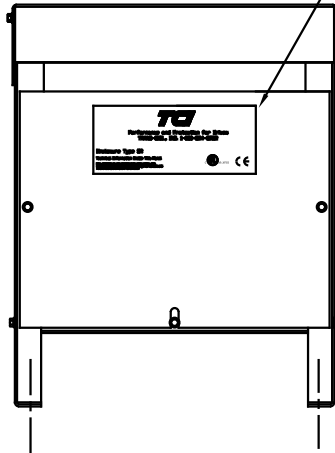

19.50 REF.

5.00
MIN

2.61

10.00

15.21

CATALOG NO	VOLTS(V)	_ _mH±10%	_ _AMPS(A)	APPROX WT-LBS
KLRUL110BPTE3R	7.20	.100	110	67
KLRUL110FPTE3R	8.62	.120	110	67

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

**KLR FRAME F (ISLCO LUGS)
TYPE 3R ENCLOSURE**

DRN BY	DATE	DRG. NO.
DSW	10/01/04	B
SCALE	APPROV.	
TO FIT		

KLRFE3R-2DG
SHT. 1 of 1