

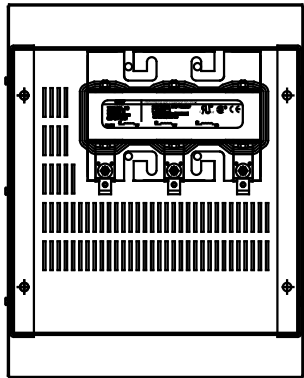
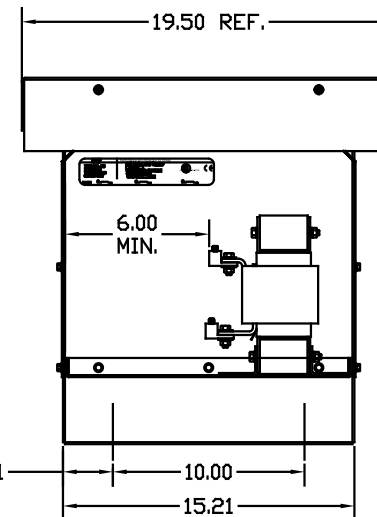


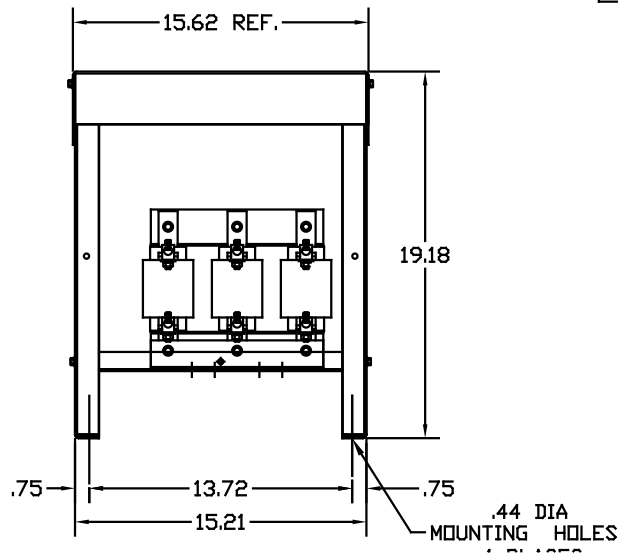

LABEL PLACED ON INSIDE WALL OF CABINET.

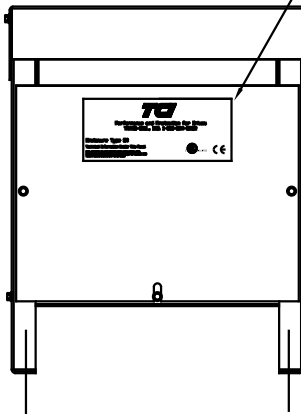

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL110CPT3R	24	.334	110	94
KLRUL130APTE3R	14.4	.170	130	91

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

				TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME G (ILSCO LUGS) TYPE 3R ENCLOSURE
				DECIMAL	
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL ± 1/32	DRN BY DSW DATE 09/21/04 SCALE TO FIT APPRVD B KLRGE3R-3DG SHT.1 OF 1
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY		