




CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL160APTE3R	14.4	.138	160	123

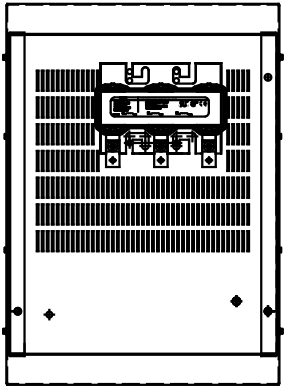


LABEL PLACED ON INSIDE WALL OF CABINET.


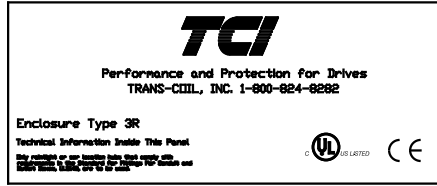


LABEL PLACED ON FRONT OF CABINET.

LUG WIRE RANGE 250MCM-6, AL OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 275 LB-IN

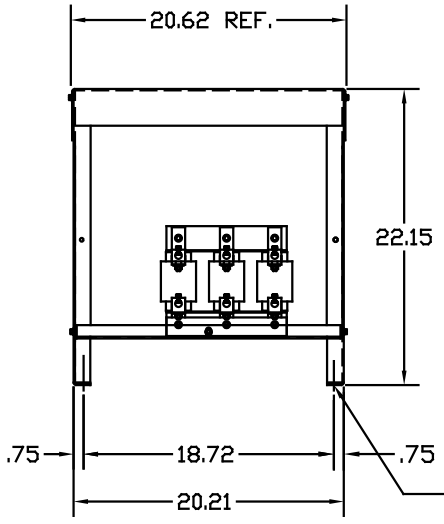

.50 DIA MOUNTING HOLE (4 PLACES)

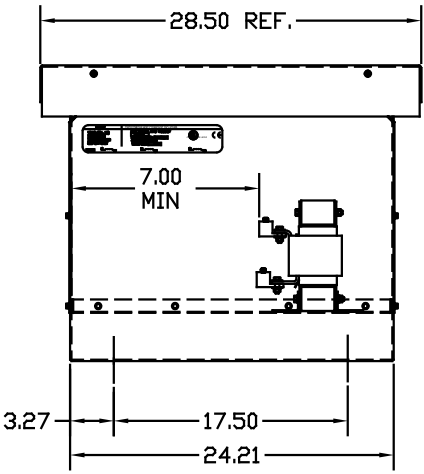

VENDOR LILLY POWDER COATINGS, INC.  
PRODUCT CODE 312E  
COLOR PEBBLE GRAY  
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

					TOLERANCES EXCEPT AS NOTED
					DECIMAL
					.XX ± .03
					.XXX ± .01
					FRACTIONAL
					± 1/32
					ANGULAR
					± 1/2°
NO	REVISION	DATE	BY		

**TCI** 7878 N. 86th STREET MILWAUKEE, WI 53224

KLR FRAME G (ILSCO LUGS) TYPE 3R ENCLOSURE

DRN BY DSW DATE 09/22/04 DWG NO. B KLRGE3R-4DG SCALE TO FIT APPRVD. SHT. 1 of 1