



LABEL PLACED ON INSIDE WALL OF CABINET.

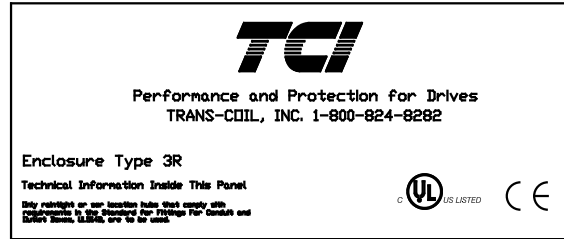


LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL130BPTE3R	7.20	.085	130	91
KLRUL130FPTE3R	8.62	.102	130	91

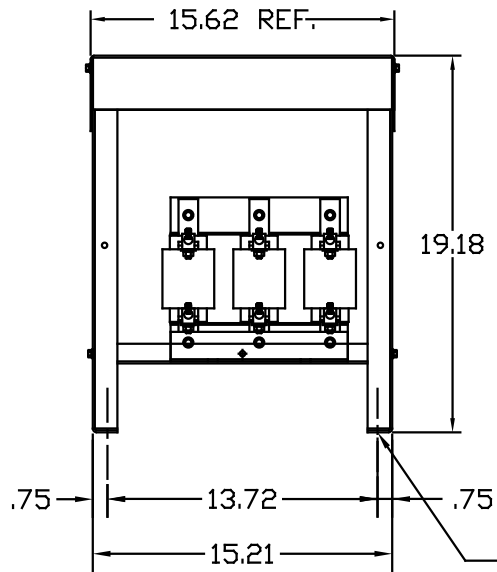

.44 DIA MOUNTING HOLES 4 PLACES.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

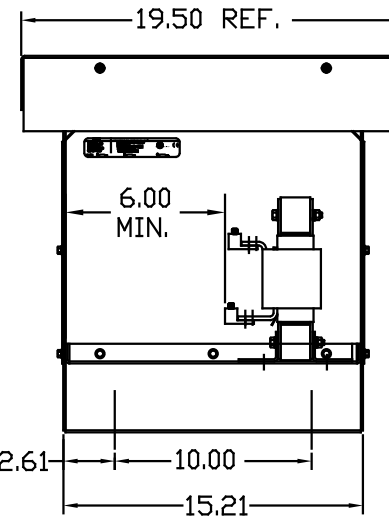

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL ± 1/32
				ANGULAR ± 1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KLR FRAME H (ILSCO LUGS) TYPE 3R ENCLOSURE

DRN BY DSW DATE 10/04/04 DWG NO. BDKLRHE3R-1DG SCALE TO FIT APPRVD. SHT. 1 OF 1