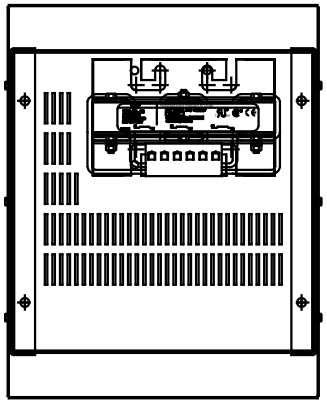

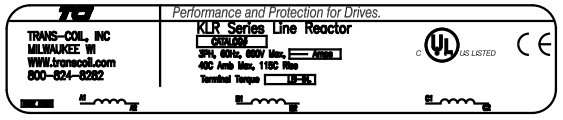

LABEL PLACED ON INSIDE WALL OF CABINET.

LABEL PLACED ON FRONT OF CABINET.

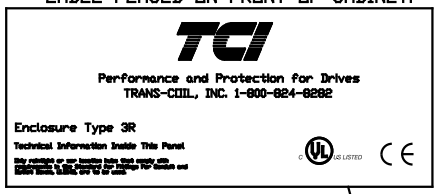

CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL45ETBE3R	28.75	.978	45	71
KLRUL55CTBE3R	24.0	.668	55	71
KLRUL80ATBE3R	14.4	.276	80	71

NOTE: A1, A2, B1, B2, C1, C2,
TERMINAL BLOCK MARKING
FOR REFERENCE ONLY.



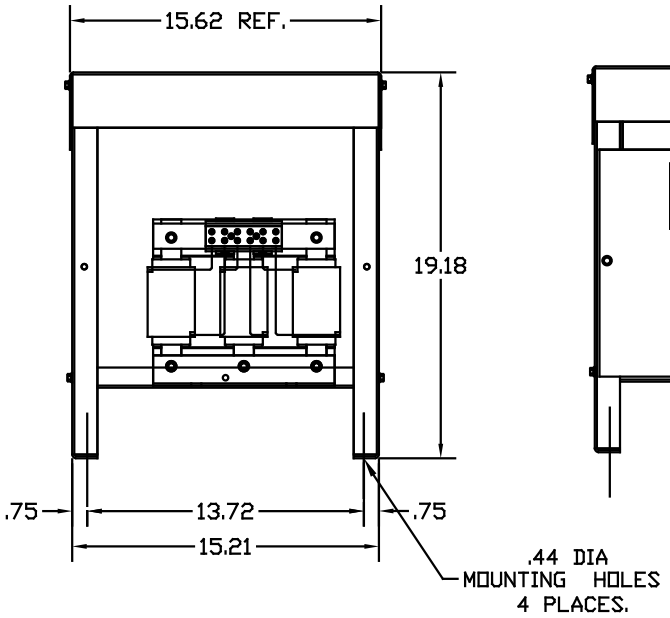

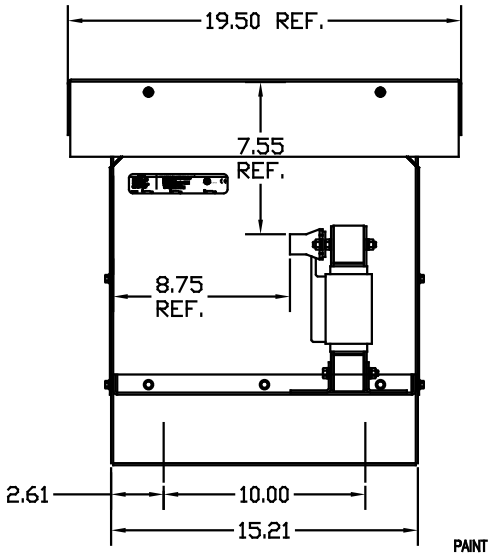

TORQUE(LB-IN)=CUSTOMER WIRE
35=1 AWG THRU 4 AWG
30=6 AWG THRU 14 AWG
25=16 AWG THRU 22 AWG

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

7878 N. 86th STREET
MILWAUKEE, WI 53224

KLR FRAME H (TERM BLOCK) TYPE 3R ENCLOSURE

DRN. BY DSW | DATE 10/05/04 | DWG. NO. B KLRHE3R-2DG
SCALE TO FIT | APRVD. | SHT. 1 OF 1