




LABEL PLACED ON INSIDE WALL OF CABINET.



LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL200BPT3R	7.20	.055	200	126
KLRUL200FPT3R	8.62	.066	200	126

LUG WIRE RANGE 250MCM-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

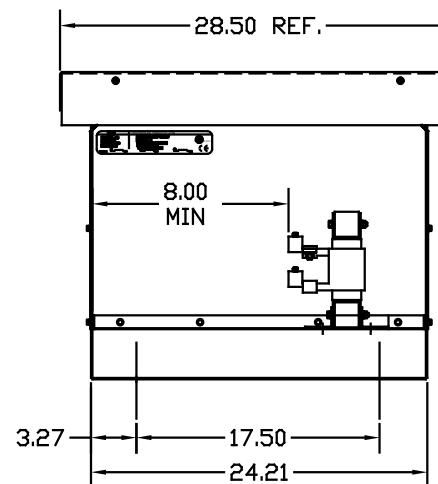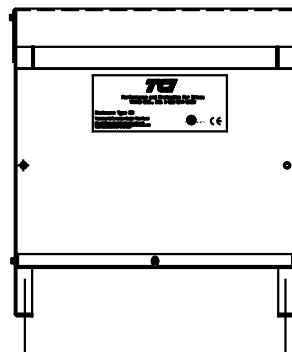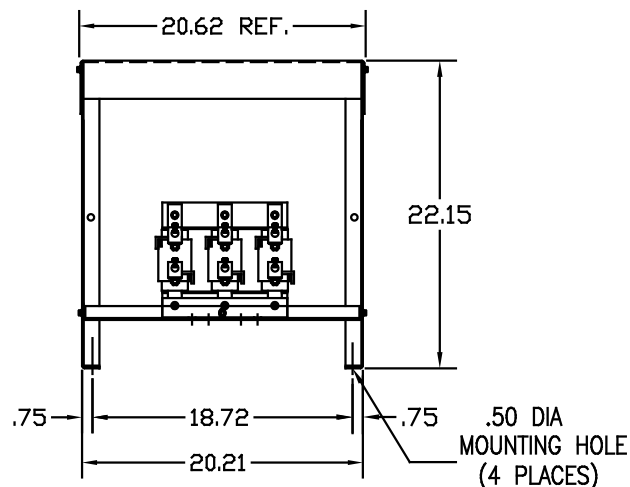

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 KDR FRAME I (ILSCO LUGS) TYPE 3R ENCLOSURE
				DECIMAL	
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL	DRN BY DSW DATE 09/22/04 DWG NO. B KLRIE3R-2DG SCALE TO FIT APPRVS. SHT. 1 OF 1
				ANGULAR	
NO	REVISION	DATE	BY	± 1/2°	