



LABEL PLACED ON INSIDE WALL OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL110APTE3R	14.40	.200	110	90
KLRUL110DPTE3R	17.25	.240	110	88
KLRUL130DPTE3R	17.25	.203	130	88



LABEL PLACED ON FRONT OF CABINET.

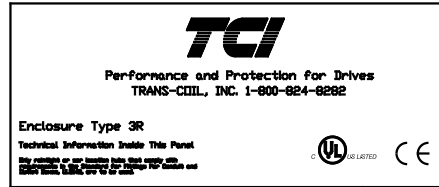

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

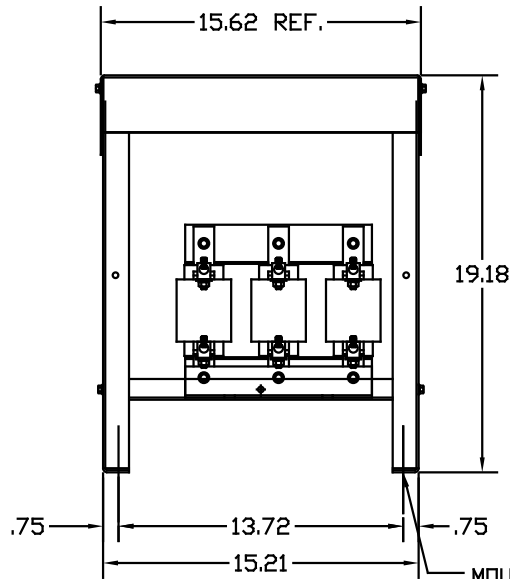

.44 DIA MOUNTING HOLES
4 PLACES.

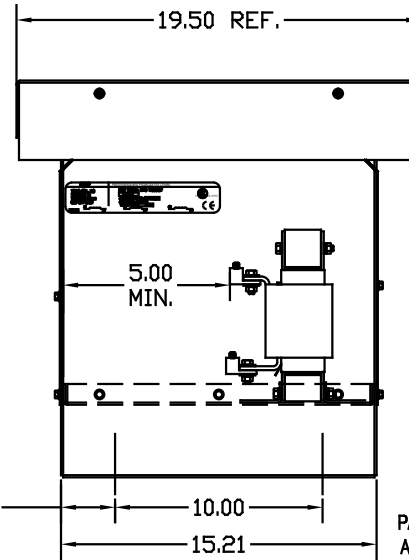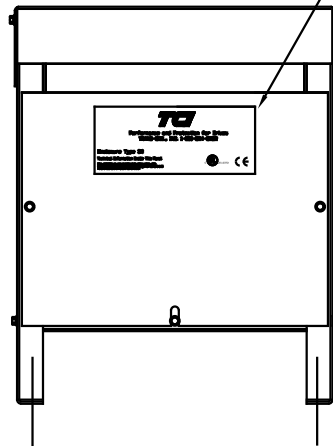

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KLR FRAME I (ILSCO LUGS)
TYPE 3R ENCLOSURE

DRN BY DSW DATE 09/20/04 DWG NO. B KLRIE3R-3DG
SCALE TO FIT APPRVD. SHT. 1 of 1