

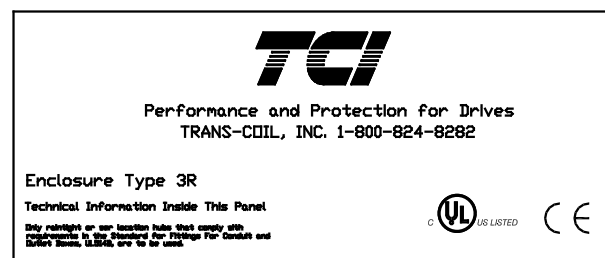


CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL360BPTE3R	7.20	.031	360	150
KLRUL360FPTE3R	8.62	.037	360	150

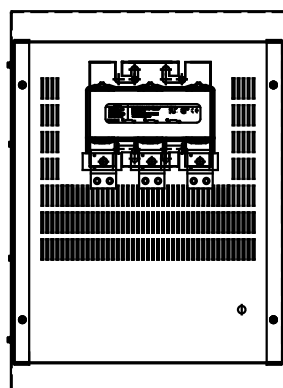


LABEL PLACED ON FRONT OF CABINET.


LUG WIRE RANGE TWO 350MCM-4, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN



LABEL PLACED ON INSIDE WALL OF CABINET.

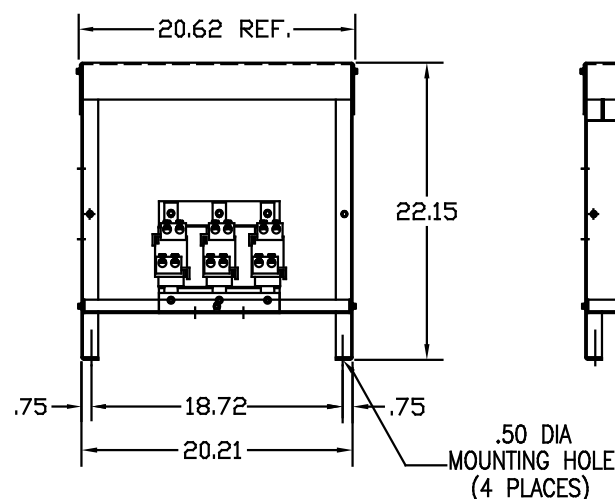

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

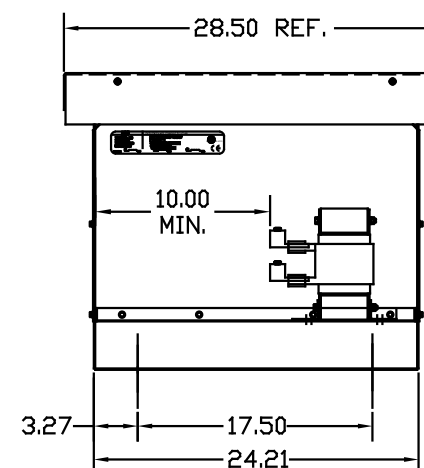

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME J (ILSCO LUGS) TYPE 3R ENCLOSURE	DRN BY DSW DATE 10/04/04 DWG NO. B KLRJE3R-2DG SCALE TO FIT APPRVD. B SHT.1 of 1
				DECIMAL		
				.XX ± .03 .XXX ± .01		
				FRACTIONAL ± 1/32		
NO	REVISION	DATE	BY	ANGULAR ± 1/2°		