




LABEL PLACED ON INSIDE WALL OF CABINET.



LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH \pm 10%	__AMPS(A)	APPROX WT-LBS
KLRUL420APTE3R	14.40	.053	420	186
KLRUL420BPTE3R	7.20	.026	420	170
KLRUL420DPTE3R	17.24	.063	420	186
KLRUL420FPTE3R	8.62	.031	420	170

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

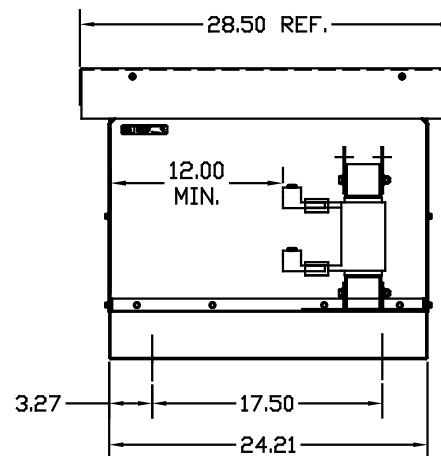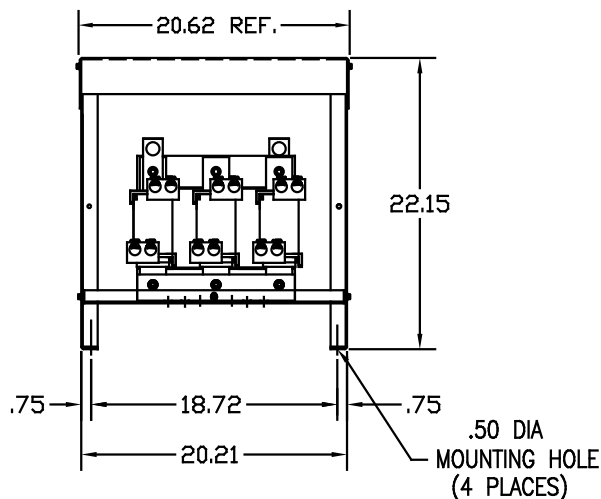

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

TOLERANCES EXCEPT AS NOTED			
DECIMAL			
.XX \pm .03			
.XXX \pm .01			
FRACTIONAL			
\pm 1/32			
ANGULAR			
\pm 1/2°			
NO	REVISION	DATE	BY

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KLR FRAME L (ILSCO LUGS)
TYPE 3R ENCLOSURE

DRN BY DSW DATE 10/04/04 DWG NO. B KLRLE3R-1DG
SCALE TO FIT APPROV. D SHT. 1 of 1