



CATALOG NO	VOLTS(V.)	mH±10%	AMPS(A)	APPROX WT-LBS
KLRUL250APTE3R	14.40	.088	250	173
KLRUL250DPTE3R	17.25	.106	250	173
KLRUL300APTE3R	14.40	.074	300	183
KLRUL300DPTE3R	17.25	.088	300	183






LABEL PLACED ON INSIDE WALL OF CABINET.

LUG WIRE RANGE ONE 600MCM-4  
FOR REACTOR. TWO 250MCM-1/0, AL. OR CU.  
TIGHTENING TORQUE. 500 LB-IN

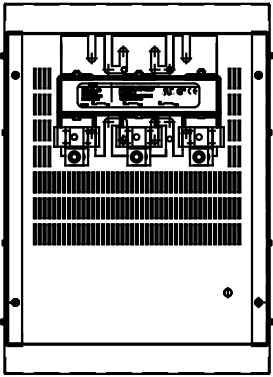

LABEL PLACED ON FRONT OF CABINET.

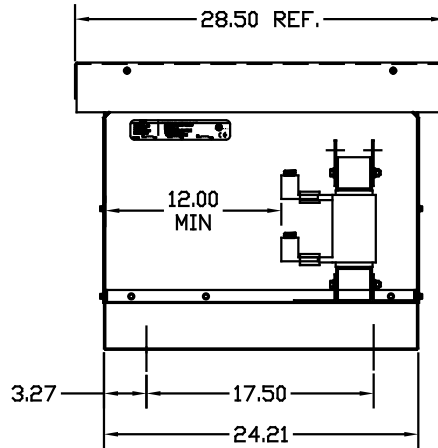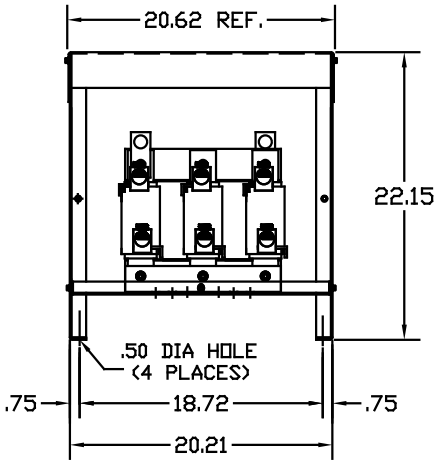

VENDOR LILLY POWDER COATINGS, INC.  
PRODUCT CODE 312E  
COLOR PEBBLE GRAY  
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL LOCAL AND NATIONAL CODES

				TOLERANCES EXCEPT AS NOTED	<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .03 .XXX ± .01	
				FRACTIONAL	DRN BY DSW DATE 10/07/04 DWG NO. B KLRLE3R-4DG
				± 1/32	SCALE TO FIT
				ANGULAR	APPRVD.
				± 1/2°	SHT. 1 of 1
NO	REVISION	DATE	BY		