



CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL300CPT3R	24.0	.123	300	205


LUG WIRE RANGE ONE 600MCM-4  
 FOR REACTOR. TWO 250MCM-1/0, AL. OR CU.  
 TIGHTENING TORQUE. 500 LB-IN

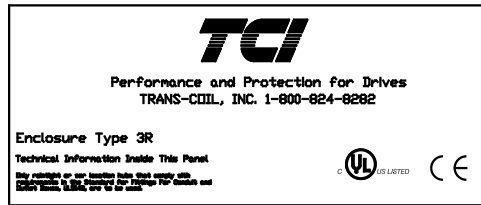


LABEL PLACED ON FRONT OF CABINET.

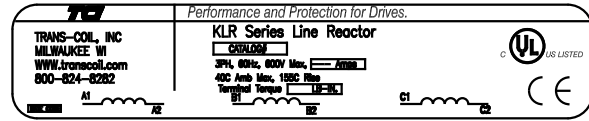

LABEL PLACED ON INSIDE WALL OF CABINET.

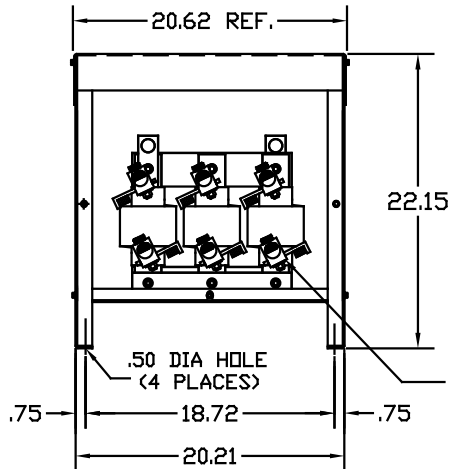

NOTE: ROTATED AS NEEDED TO MEET CLEARANCE BETWEEN TERMINAL OR LUGS (PHASE TO PHASE), ALSO TO MEET CLEARANCE FROM TERMINALS OR LUGS TO GROUNDING SURFACE.

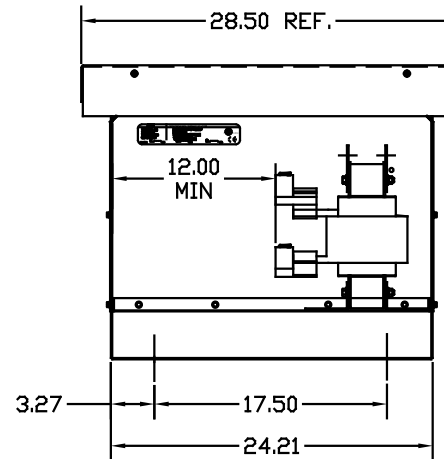

VENDOR LILLY POWDER COATINGS, INC.  
 PRODUCT CODE 312E  
 COLOR PEBBLE GRAY  
 POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

					TOLERANCES EXCEPT AS NOTED
					DECIMAL
					.XX ± .03
					.XXX ± .01
					FRACTIONAL
					± 1/32
					ANGULAR
					± 1/2°
NO	REVISION	DATE	BY		

**TCI** 7878 N. 86th STREET  
 MILWAUKEE, WI 53224

KLR FRAME L (ILSCO LUGS)  
 TYPE 3R ENCLOSURE

DRN BY	DATE	DRG NO.
DSW	10/06/04	B
SCALE	APPRVD.	
TO FIT		

KLRLE3R-7DG  
 SHT. 1 of 1