



LABEL PLACED ON INSIDE WALL OF CABINET.

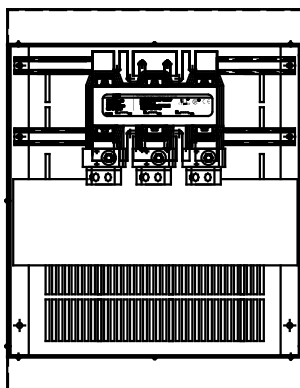


LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL480CPTE3R	24.00	.077	480	360
KLRUL480EPTE3R	28.75	.092	480	360
KLRUL600APTE3R	14.40	.037	600	335
KLRUL600DPTE3R	17.25	.044	600	335

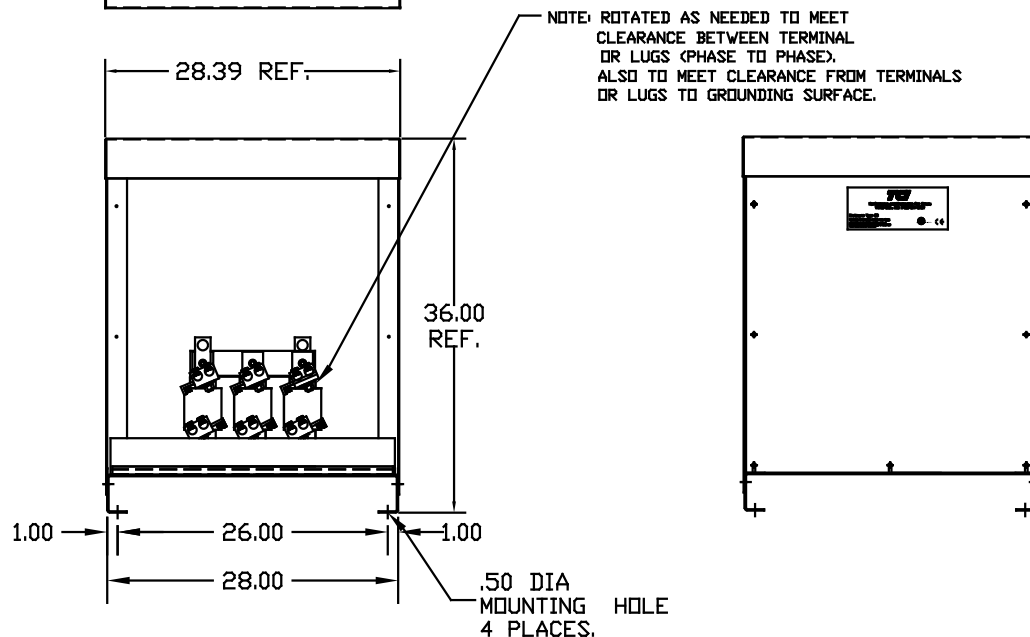

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

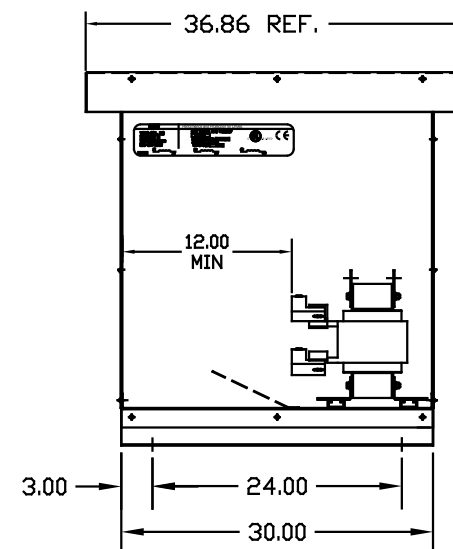

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

				TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME S (ILSCO LUGS) TYPE 3R ENCLOSURE		
				DECIMAL		DRN BY	DATE
				.XX ± .03		DSW	09/22/04
				.XXX ± .01		SCALE	APPROV.
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1/2°			
NO	REVISION	DATE	BY				

DWG. NO. B KLRSE3R-2DG
SHT. 1 OF 1