




LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL420CPT3R	24.00	.088	420	352
KLRUL420EPT3R	28.75	.105	420	352

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

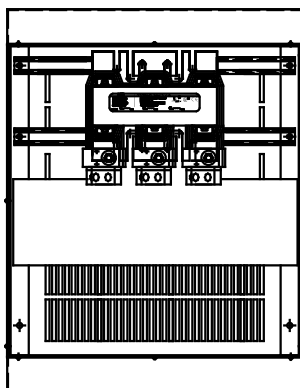

LABEL PLACED ON INSIDE WALL OF CABINET.

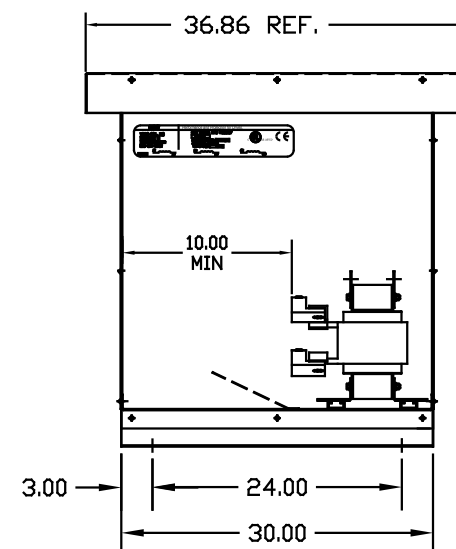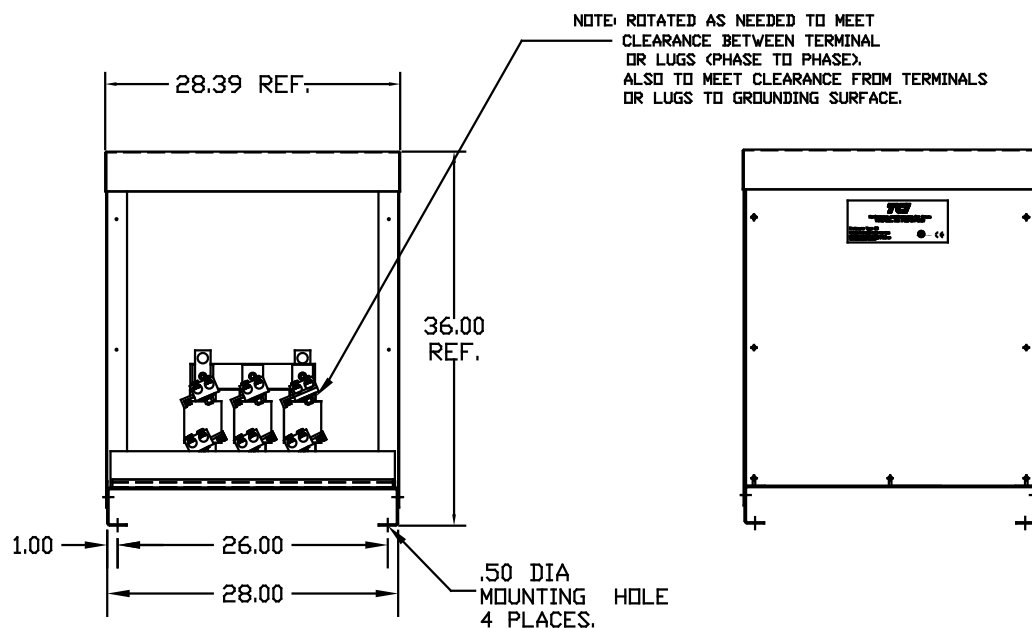

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

				TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME S (ILSCO LUGS) TYPE 3R ENCLOSURE
				DECIMAL	
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL	DRN BY DSW DATE 10/06/04 DWG NO. B KLRSE3R-3DG SCALE TO FIT APPROV. SHT. 1 OF 1
				± 1/32	
				ANGULAR	
NO	REVISION	DATE	BY	± 1/2°	