




LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL300EPTE3R	28.75	.147	300	335

LUG WIRE RANGE FOR REACTOR.	ONE 600MCM-4 TWO 250MCM-1/0, AL. OR CU.
TIGHTENING TORQUE.	500 LB-IN




LABEL PLACED ON INSIDE WALL OF CABINET.

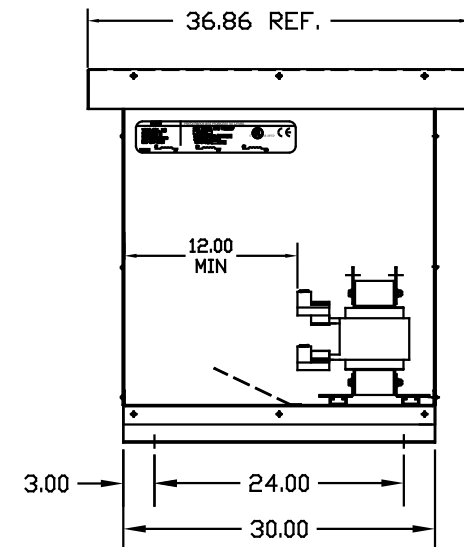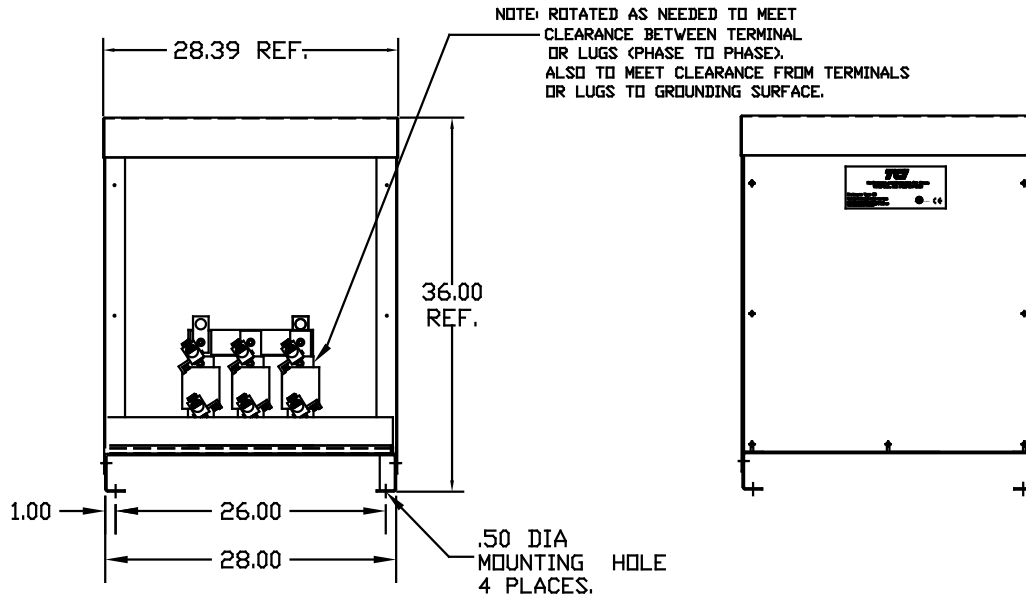

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME S (ILSCO LUGS) TYPE 3R ENCLOSURE		
				DECIMAL		DRN BY	DATE
				.XX ± .03		DSW	10/06/04
				.XXX ± .01		SCALE	TO FIT
				FRACTIONAL ± 1/32	DWG. NO. B KLRSE3R-5DG SHT. 1 of 1	APPRV.	
				ANGULAR ± 1/2°			
NO	REVISION	DATE	BY				