


CATALOG NO	VOLTS(V.)	__MH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL360EPT3R	28.75	.122	360	345




LUG WIRE RANGE TWO 350MCM-4, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN



LABEL PLACED ON FRONT OF CABINET.

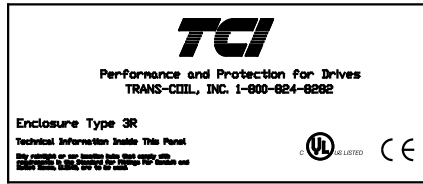

LABEL PLACED ON INSIDE WALL OF CABINET.

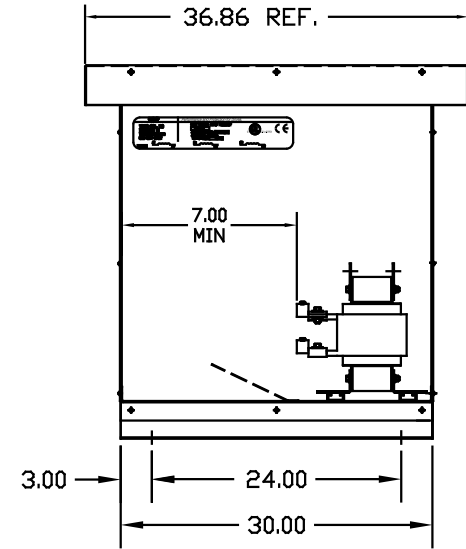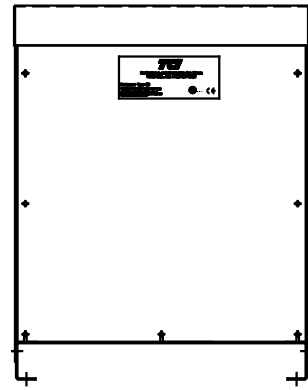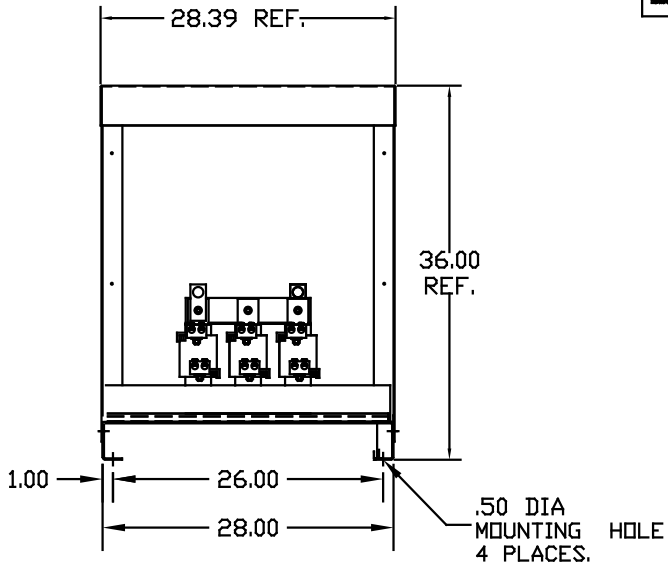

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

**KLR FRAME S (ILSCO LUGS)
TYPE 3R ENCLOSURE**

DRN BY	DATE	DWG NO.
DSW	10/06/04	B KLRSE3R-6DG
SCALE	APPRV.	
TO FIT		SHT. 1 of 1