



LABEL PLACED ON INSIDE WALL OF CABINET.

CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL110BPTE01	7.20	.100	110	63
KLRUL110FPTE01	8.62	.120	110	63



LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

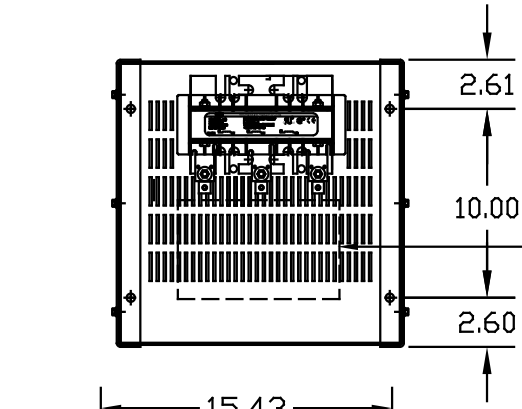

RECOMMENDED CONDUIT
ENTRANCE AREA - LEFT FRONT SIDE,
BOTTOM FRONT. RIGHT FRONT SIDE AND
TOP.

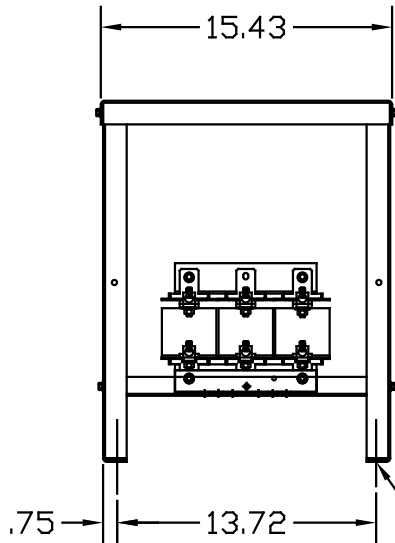


.75 → 13.72 →
.44 DIA HOLES
4 PLACES.

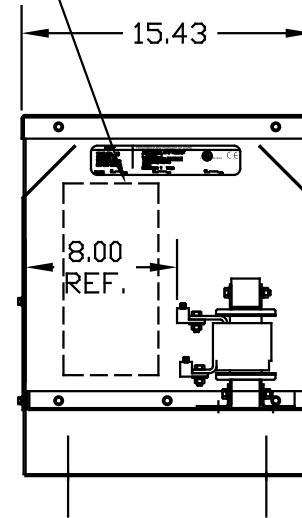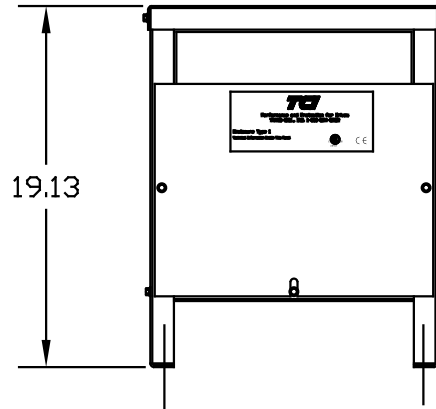

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	 7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME F TYPE 1 ENCLOSURE	DRN BY	DATE	DWG. NO.	
				DECIMAL			DSW	12/08/03	B
				.XX ± .03 .XXX ± .01			SCALE	APPROV.	
				FRACTIONAL ± 1/32 ANGULAR ± 1/2°			TO FIT		
					KLRULENCL-11DG SHT. 1 of 1				