

LABEL PLACED ON INSIDE WALL OF CABINET.




RECOMMENDED CONDUIT
ENTRANCE AREA - LEFT FRONT SIDE,
BOTTOM FRONT. RIGHT FRONT SIDE AND
TOP.

| CATALOG NO | VOLTS(V.) | __mH±10% | __AMPS(A) | APPROX WT-LBS |
|----------------|-----------|----------|-----------|---------------|
| KLRUL130BPTE01 | 7.20 | .085 | 130 | 70 |
| KLRUL130FPTE01 | 8.62 | .102 | 130 | 70 |

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN



LABEL PLACED ON FRONT OF CABINET.

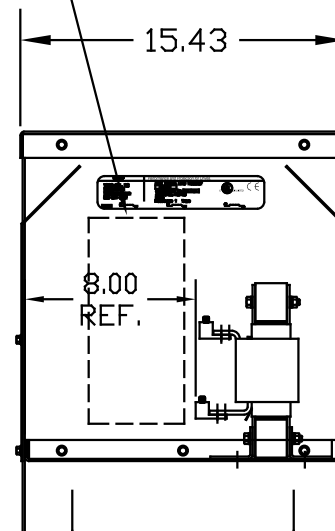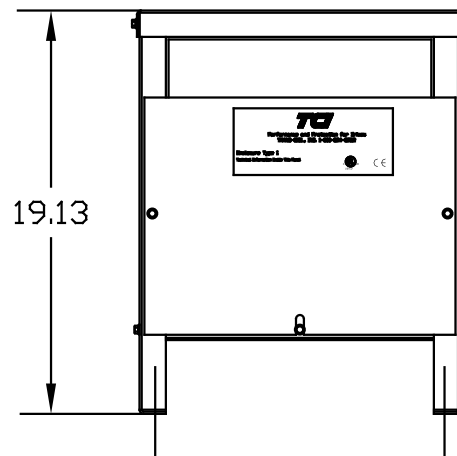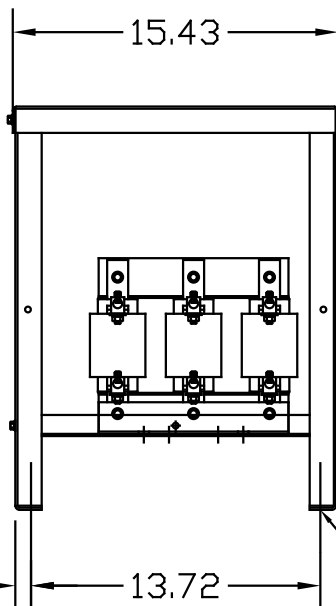



VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

.44 DIA HOLES
4 PLACES.

| | | | | | | | | | |
|----|----------|------|----|--|--|---------------------------------|--|--|--|
| | | | | | | TOLERANCES (EXCEPT AS NOTED) | |  7878 N. 86th STREET MILWAUKEE, WI 53224 | |
| | | | | | | DECIMAL | | | |
| | | | | | | .XX ± .03 | | KLR FRAME H (ILSCO LUGS) TYPE 1 ENCLOSURE | |
| | | | | | | .XXX± .01 | | | |
| | | | | | | FRACTIONAL ± 1/32 | | DRN BY  DATE 12/08/03 DWG NO. B KLRULENCL -15DG SCALE TO FIT APPRVD. SHT. 1 OF 1 | |
| | | | | | | ANGULAR ± 1/2° | | | |
| NO | REVISION | DATE | BY | | | | | | |