


CATALOG NO	VOLTS(V)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL250BPTE01	7.20	.044	250	123
KLRUL250FPTE01	8.62	.053	250	123

LABEL PLACED ON INSIDE WALL OF CABINET.

LUG WIRE RANGE ONE 600MCM-4
 FOR REACTOR. TWO 250MCM-1/0, AL. OR CU.
 TIGHTENING TORQUE. 500 LB-IN



LABEL PLACED ON FRONT OF CABINET.



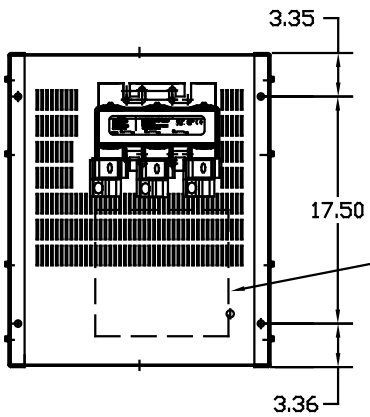


RECOMMENDED CONDUIT
 ENTRANCE AREA - LEFT FRONT SIDE,
 BOTTOM FRONT. RIGHT FRONT SIDE AND
 TOP.

NOTE: LUGS ROTATED TO MEET CLEARANCE
 (PHASE TO PHASE),
 AND TO MEET CLEARANCE FROM LUGS
 TO GROUNDING SURFACE.

VENDOR LILLY POWDER COATINGS, INC.
 PRODUCT CODE 312E
 COLOR PEBBLE GRAY
 POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
 AND APPLIED PER A UL ACCEPTED DTWV2 COATING PROGRAM.

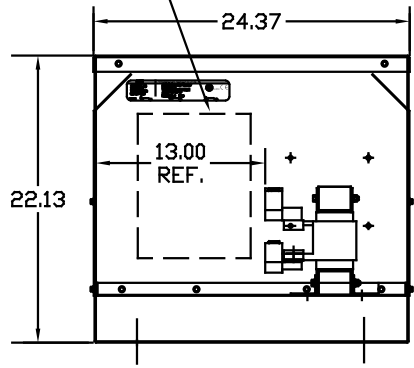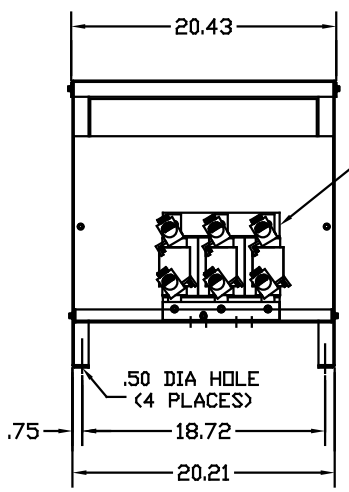

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY

TCI 7878 N. 86th STREET
 MILWAUKEE, WI 53224
KLR FRAME G (ILSCO LUGS)
TYPE 1 ENCLOSURE
 DRN BY DSW DATE 12/08/03 DWG NO. B KLRULENCL-20DG
 SCALE TO FIT APPRVD. SHT. 1 OF 1

TOLERANCES EXCEPT AS NOTED
 DECIMAL
 .XX ± .03
 .XXX ± .01
 FRACTIONAL
 ± 1/32
 ANGULAR
 ± 1/2°