

LABEL PLACED ON INSIDE WALL OF CABINET.







LABEL PLACED ON FRONT OF CABINET.

RECOMMENDED CONDUIT ENTRANCE AREA - LEFT FRONT SIDE, BOTTOM FRONT, RIGHT FRONT SIDE AND TOP.

CATALOG NO	VOLTS(V.)	mH±10%	AMPS(A)	APPROX WT-LBS
KLRUL250APTE01	14.40	.088	250	169
KLRUL250DPTE01	17.25	.106	250	169
KLRUL300APTE01	14.40	.074	300	179
KLRUL300DPTE01	17.25	.088	300	179

LUG WIRE RANGE ONE 600MCM-4
FOR REACTOR. TWO 250MCM-1/0, AL. OR CU.
TIGHTENING TORQUE. 500 LB-IN

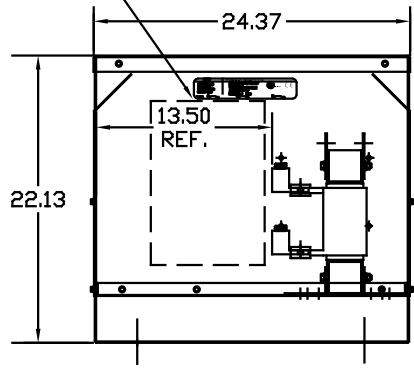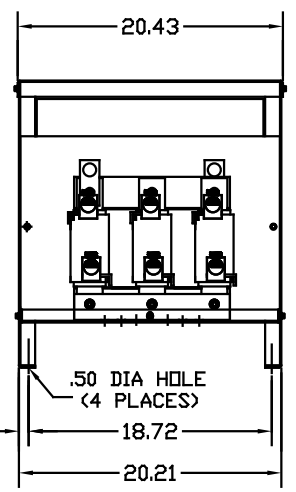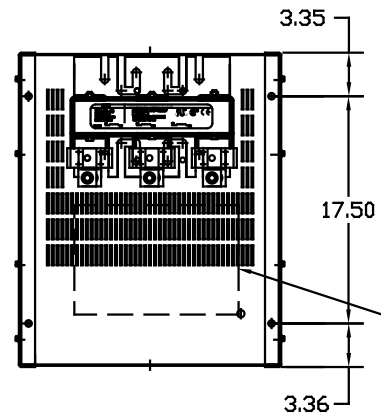

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KLR FRAME L (ILSCO LUGS)
TYPE 1 ENCLOSURE

DRN BY **DSW** DATE **12/09/03** DWG NO. **B**
SCALE **TO FIT** APPRVD. **B** KLRULENCL-22DG
SHT. 1 of 1