
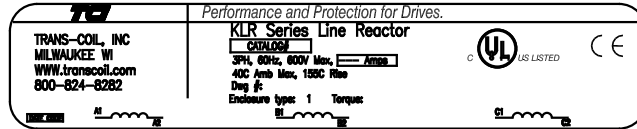


CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL360BPTE01	7.20	.031	360	146
KLRUL360FPTE01	8.62	.037	360	146

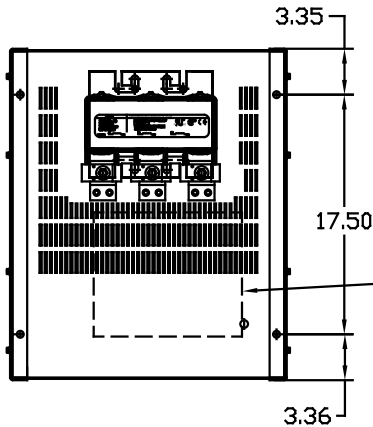


LABEL PLACED ON INSIDE WALL OF CABINET.




RECOMMENDED CONDUIT ENTRANCE AREA - LEFT FRONT SIDE, BOTTOM FRONT, RIGHT FRONT SIDE AND TOP.

NOTE: LUGS ROTATED TO MEET CLEARANCE (PHASE TO PHASE) AND TO MEET CLEARANCE FROM LUGS TO GROUNDING SURFACE.

LUG WIRE RANGE TWO 350MCM-4, AL. OR CU. FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

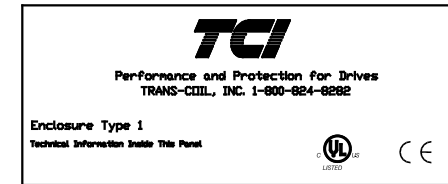

LABEL PLACED ON FRONT OF CABINET.

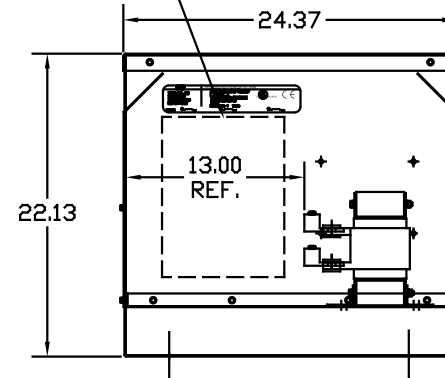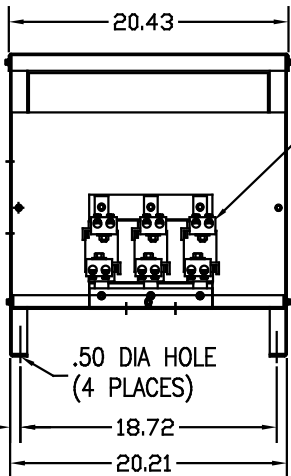

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224 KLR FRAME J (ILSCO LUG) TYPE 1 ENCLOSURE	DRN BY	DATE	DWG NO.
				DECIMAL		DSW	12/09/03	B
				.XX ± .03 .XXX ± .01		SCALE	TO FIT	APPRV.
				FRACTIONAL ± 1/32 ANGULAR ± 1/2°				
								DKLRULENCL-26DG SHT.1 of 1