




LABEL PLACED ON INSIDE WALL OF CABINET.




LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL360EPT01	28.75	.122	360	335



LUG WIRE RANGE TWO 350MCM-4, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

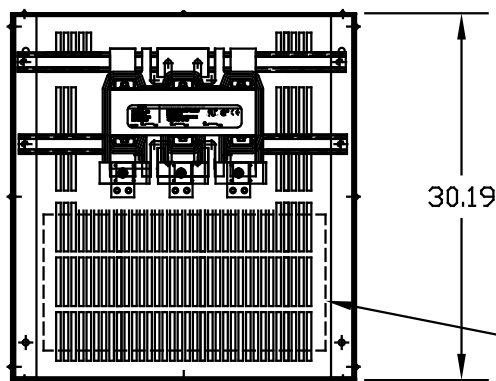

RECOMMENDED CONDUIT
ENTRANCE AREA - LEFT FRONT SIDE,
BOTTOM FRONT. RIGHT FRONT SIDE AND TOP.

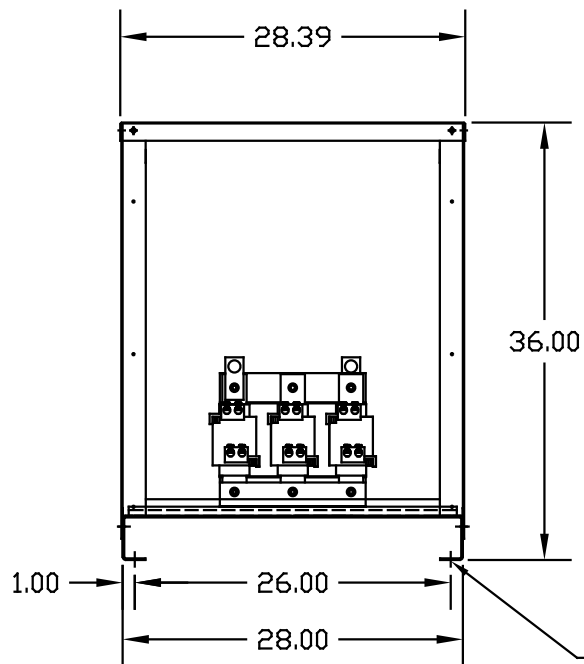

.50 DIA
MOUNTING HOLE
4 PLACES.

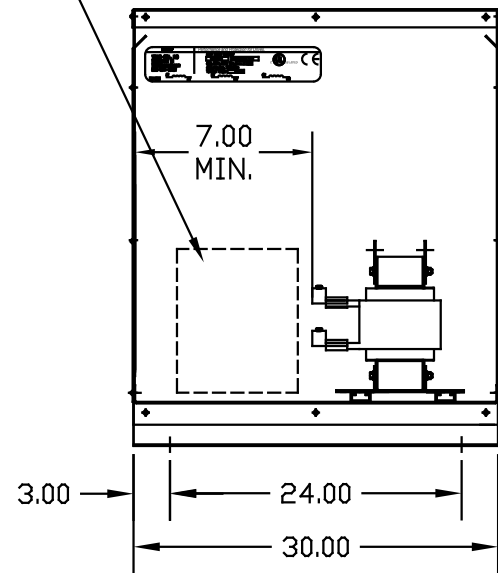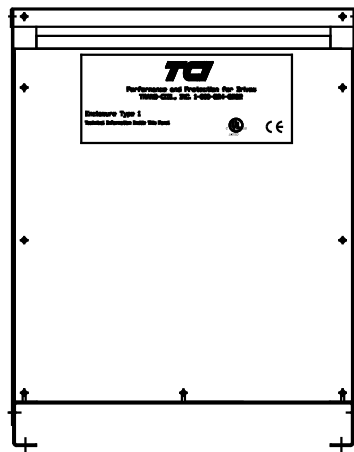

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

				TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224
				XX ±.03	
				.XXX ±.01	KLR FRAME S (ILSCO LUGS) TYPE 1 ENCLOSURE
				FRACTURAL ± 1/32	
				ANGULAR ± 1/2°	DRG. BY DSW DATE 07/06/04 SCALE TO FIT APPROV. C KLRULENCL-29D0G SHT. 1 OF 1
NO	REVISION	DATE	BY		