
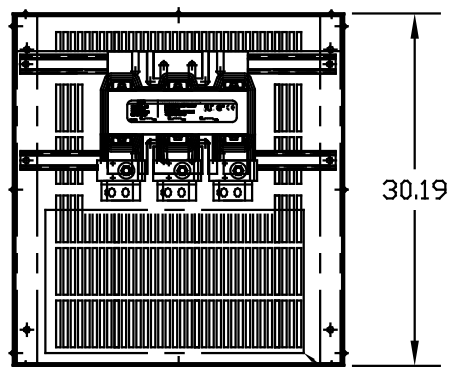


CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL420CPT01	24.00	.088	420	345
KLRUL420EPT01	28.75	.105	420	345



LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

RECOMMENDED CONDUIT
ENTRANCE AREA - LEFT FRONT SIDE,
BOTTOM FRONT, RIGHT FRONT SIDE AND
TOP.

NOTE: LUGS ROTATED TO MEET CLEARANCE
(PHASE TO PHASE).
AND TO MEET CLEARANCE FROM LUGS
TO GROUNDING SURFACE.

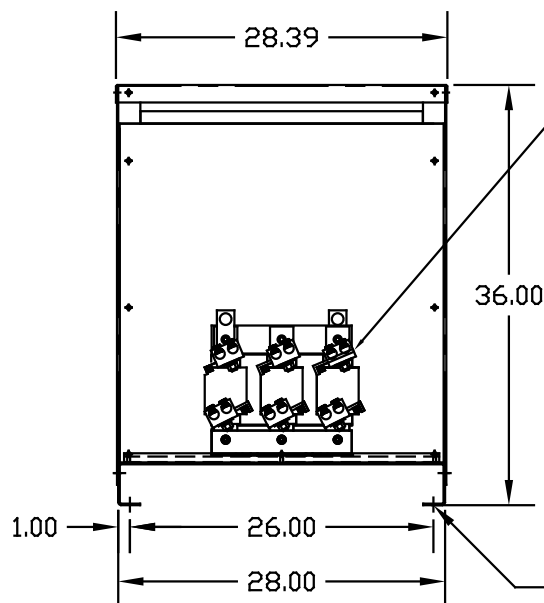

.50 DIA
MOUNTING HOLE
4 PLACES.

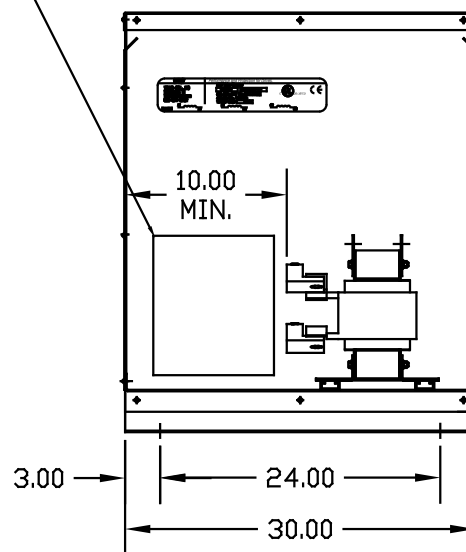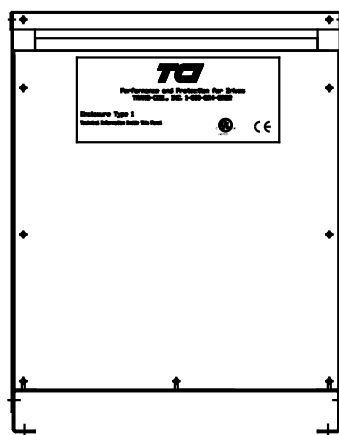

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

				TOLERANCES EXCEPT AS NOTED	 7878 N. 86th STREET MILWAUKEE, WI 53224
NO	REVISION	DATE	BY	XX ±.03 .XXX±.01 FRACTURAL ± 1/32 ANGULAR ± 1/2°	
					KLR FRAME S (ILSCO LUGS) TYPE 1 ENCLOSURE
					DRG BY DSW DATE 07/06/04 DWG NO. KLRULENCL-31DG SCALE TO FIT APPRVS C SHT. 1 OF 1