
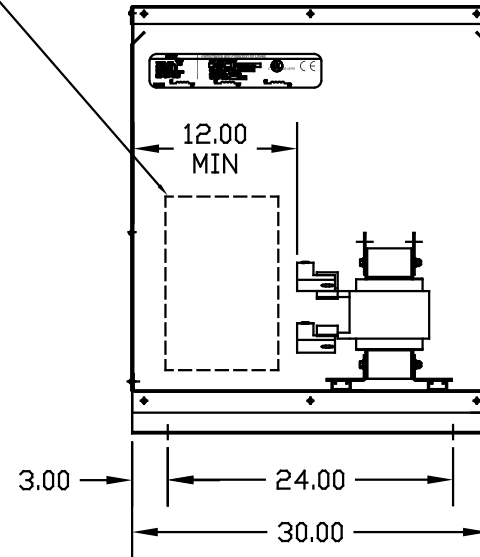
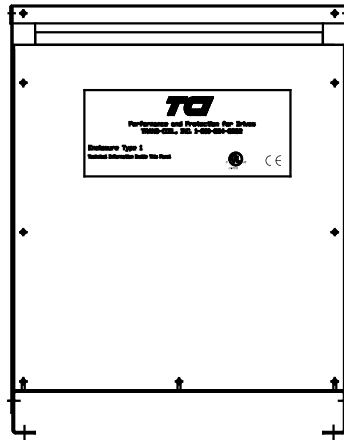


CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL480CPTTE01	24.00	.077	480	350
KLRUL480EPTTE01	28.75	.092	480	350
KLRUL600APTE01	14.40	.037	600	325
KLRUL600DPTTE01	17.25	.044	600	325

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

RECOMMENDED CONDUIT ENTRANCE AREA - LEFT FRONT SIDE, BOTTOM FRONT. RIGHT FRONT SIDE AND TOP.

NOTE: LUGS ROTATED TO MEET CLEARANCE (PHASE TO PHASE) AND TO MEET CLEARANCE FROM LUGS TO GROUNDING SURFACE.

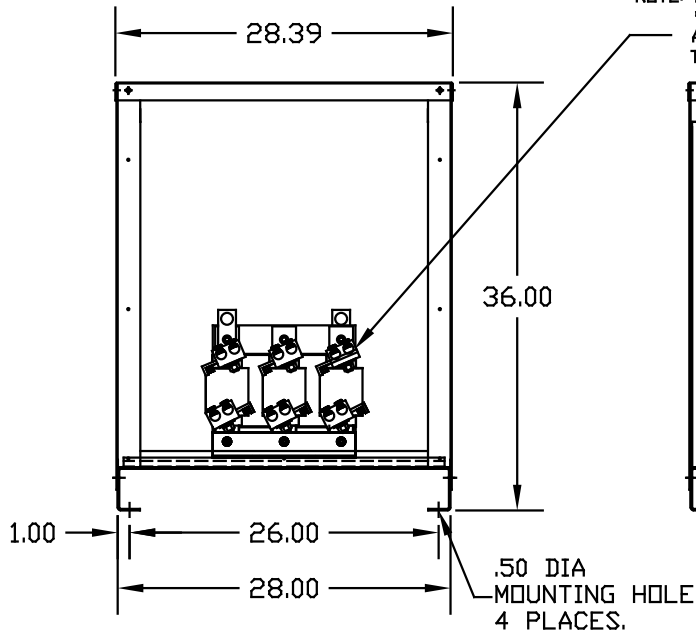

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

TOLERANCES EXCEPT AS NOTED				TOLERANCES EXCEPT AS NOTED	DRAWN BY	DATE	DWG. NO.
NO	REVISION	DATE	BY				
				DECIMAL	DSW	07/06/04	KLRULENCL-35.DWG
				XX ±.03			
				.XXX±.01			
				FRACTIONAL ± 1/32			
				ANGULAR ± 1/2°			
				SCALE TO FIT			

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KLR FRAME S (ILSCO LUGS)
TYPE 1 ENCLOSURE

SHT. 1 OF 1