





LABEL PLACED ON INSIDE WALL OF CABINET.

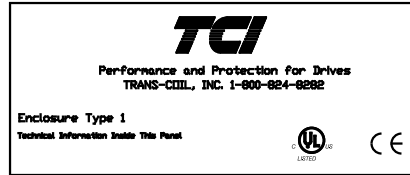

LABEL PLACED ON FRONT OF CABINET.


CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL750BPTE01	7.20	.015	750	480
KLRUL750FPTE01	8.62	.018	750	480

LUG WIRE RANGE TWO 800MCM-300MCM, AL. OR CU.
 FOR REACTOR.
 TIGHTENING TORQUE. 375 LB-IN


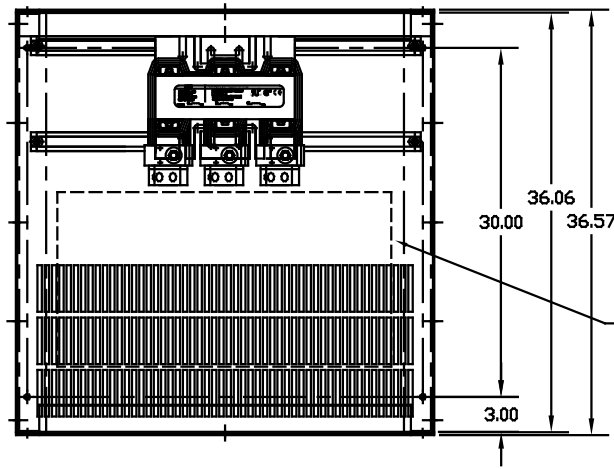


RECOMMENDED CONDUIT
 ENTRANCE AREA - LEFT FRONT SIDE,
 BOTTOM FRONT. RIGHT FRONT SIDE AND
 TOP.

NOTE: LUGS ROTATED TO MEET CLEARANCE
 (PHASE TO PHASE).
 AND TO MEET CLEARANCE FROM LUGS
 TO GROUNDING SURFACE.

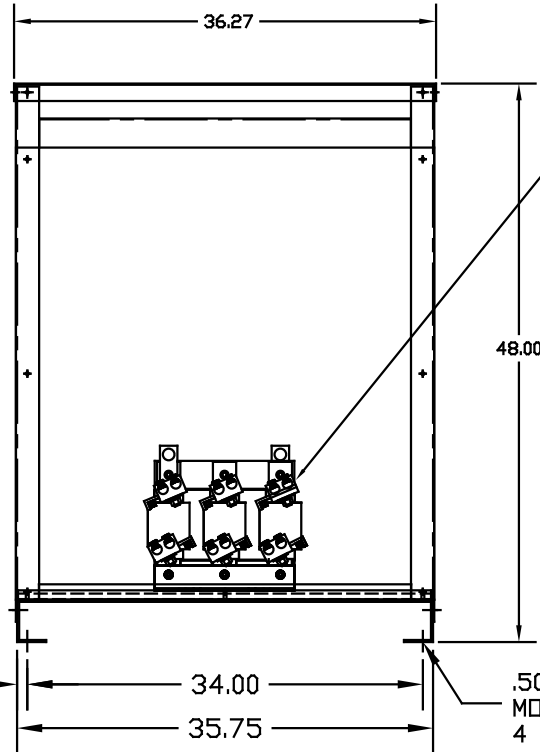

.50 DIA
 MOUNTING HOLE
 4 PLACES.

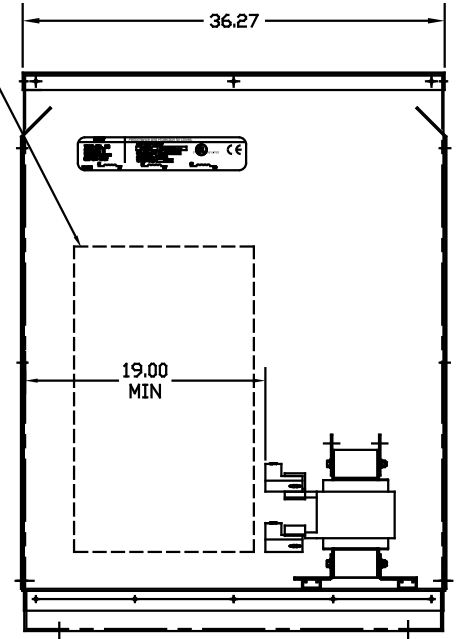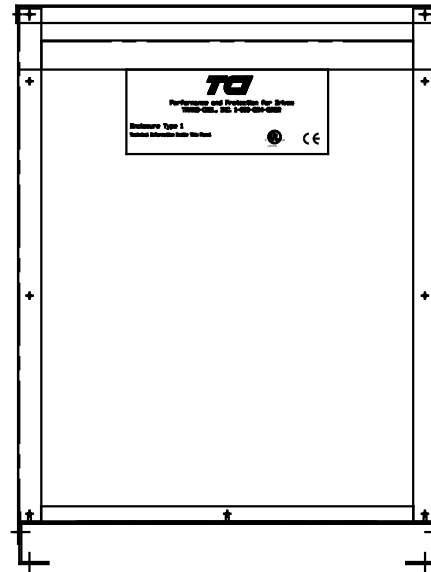

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
 PRODUCT CODE 312E
 COLOR PEBBLE GRAY
 POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
 AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

TOLERANCES EXCEPT AS NOTED				7878 N. 86th STREET MILWAUKEE, WI 53224
NO	REVISION	DATE	BY	
				KLR FRAME S (ILSCO LUGS) TYPE 1 ENCLOSURE
				Dwg. No. KLRULENCL-41DG Date 07/06/04 Scale TO FIT
				Dwg. No. C Date 07/06/04 Scale TO FIT
				SHT. 1 OF 1