



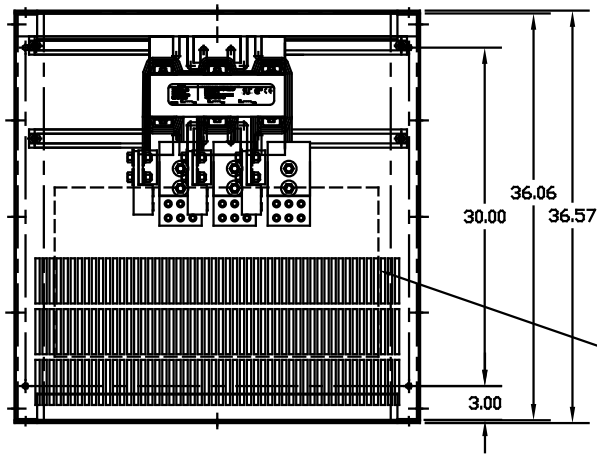

LABEL PLACED ON INSIDE WALL OF CABINET.



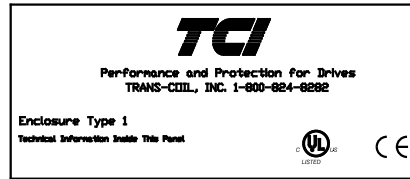


LABEL PLACED ON FRONT OF CABINET.

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL850BPTE01	7.20	.013	850	490
KLRUL950BPTE01	7.20	.012	950	495

LUG WIRE RANGE THREE 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

RECOMMENDED CONDUIT
ENTRANCE AREA - LEFT FRONT SIDE,
BOTTOM FRONT. RIGHT FRONT SIDE AND
TOP.

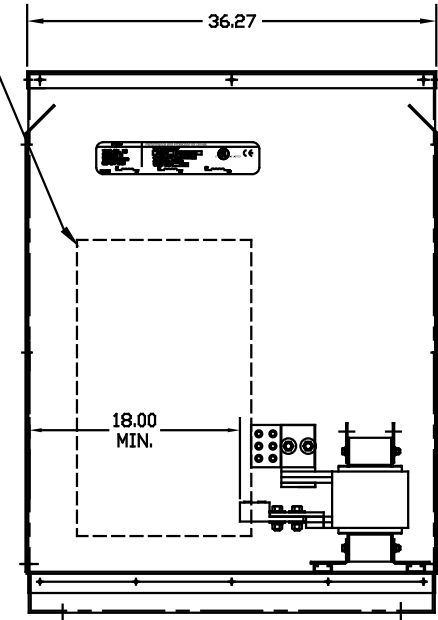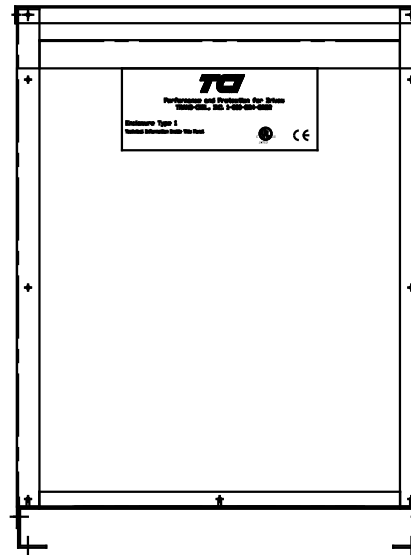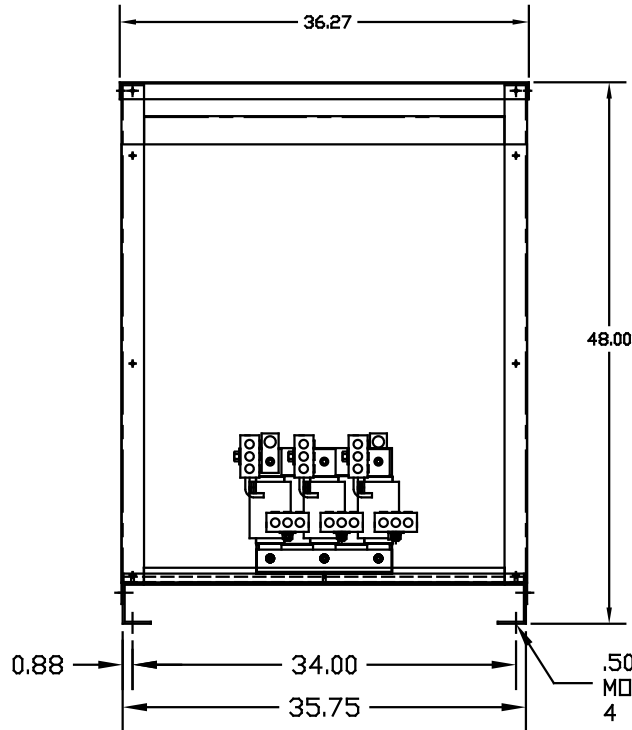

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

TOLERANCES EXCEPT AS NOTED				 7878 N. 86th STREET MILWAUKEE, WI 53224	
NO	REVISION	DATE	BY		
				XX ±.03	KLR FRAME S (ILSCO LUGS) TYPE 1 ENCLOSURE DRG BY DSW DATE 07/06/04 DRG NO. C KLRULENCL-43D6 SCALE TO FIT APPRVL SHT. 1 OF 1
				.XXX ±.01	
				FRACTURAL ± 1/32	
				ANGULAR ± 1/2°	