


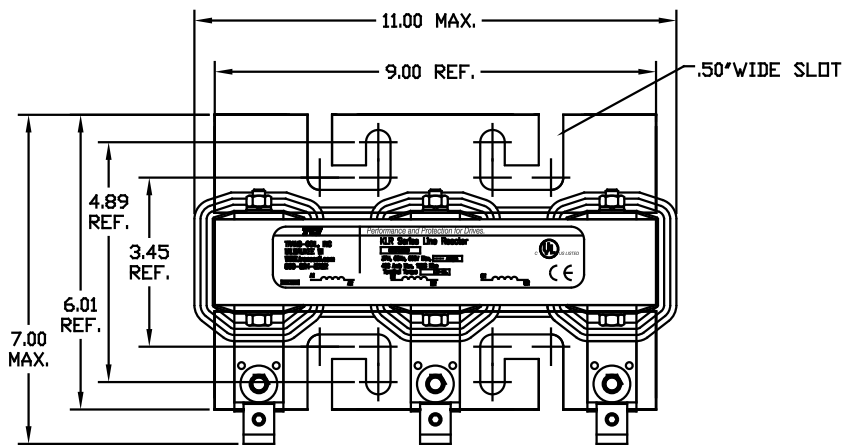

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL110APT	14.40	.200	110	52
KLRUL110DPT	17.25	.240	110	50
KLRUL130DPT	17.25	.203	130	50

TCI
 TRANS-COIL, INC
 MILWAUKEE WI
 WWW.transcoil.com
 800-824-8282



Performance and Protection for Drives.
KLR Series Line Reactor
 CATALOG# _____
 3PH, 60Hz, 600V Max, _____ Amps
 40C Amb Max, 155C Rise
 Terminal Torque _____ LB-IN

A1 A2


B1 B2

C1 C2

UL US LISTED

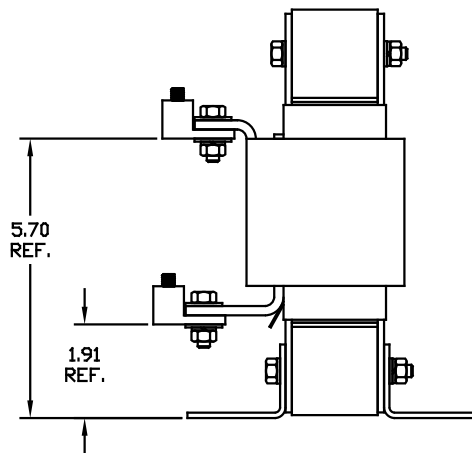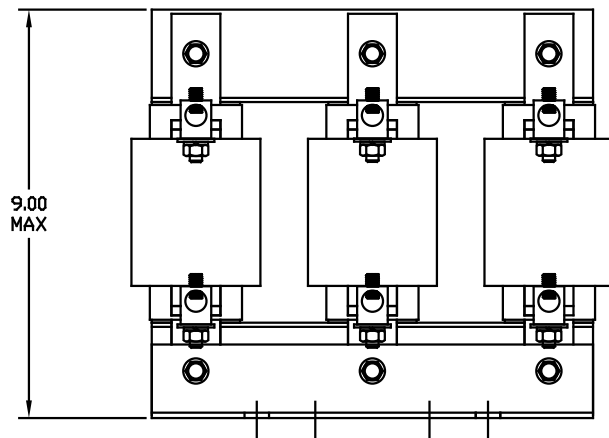

LUG WIRE RANGE 2/0-6, AL OR CU.
 FOR REACTOR.
 TIGHTENING TORQUE. 120 LB-IN

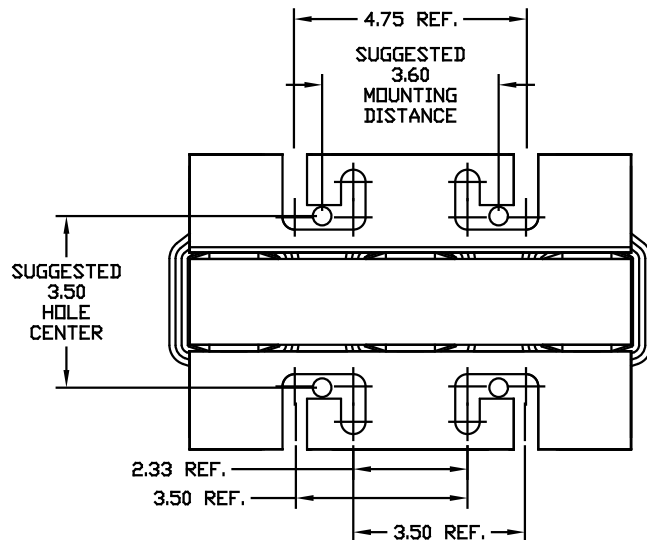

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .03 .XXX ± .01			
				FRACTIONAL		KLRUL OPEN (FRAME I) LINE REACTOR	
				± 1/32			
				ANGULAR		DIN. BY	
				± 1/2°		DATE 05/10/04	
NO		REVISION	DATE	BY	SCALE 1/2"=1"	APPROV	DWG. NO. C KLRULOPEN-10DG SHT. 1 OF 1