
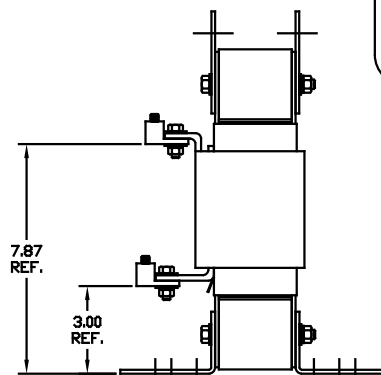
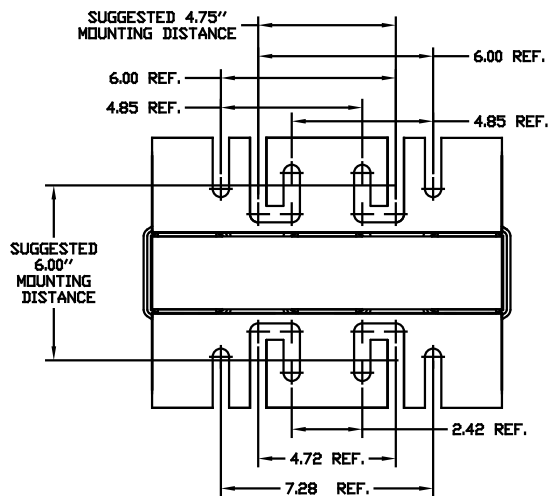
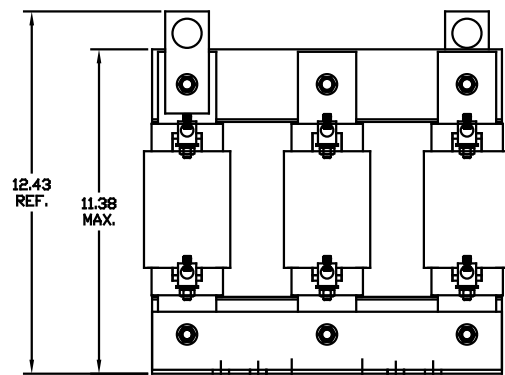


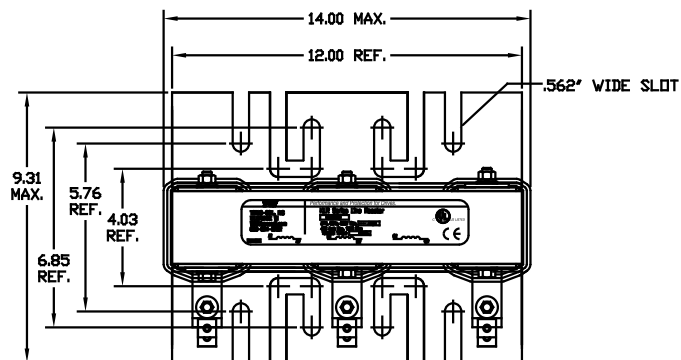

CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL110EPT	28.75	.400	110	85
KLRUL130CPT	24.0	.283	130	85
KLRUL130EPT	28.75	.339	130	85

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

Performance and Protection for Drives.

KLR Series Line Reactor

CATALOG

3PH, 60Hz, 600V Max, Amperes

40C Amb Max, 155C Rise

Terminal Torque LB-IN

UL US LISTED

CE

LUG WIRE RANGE 2/0-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 120 LB-IN

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224	KLRUL OPEN (FRAME L) LINE REACTOR	DWN BY DSW SCALE TO FIT	DATE 05/12/04 APPRV.	DWG NO. B KLRULOPEN -14DG SHT.1 of 1
				DECIMAL					
				.XX ± .03 .XXX ± .01					
				FRACTIONAL ± 1/32					
NO	REVISION	DATE	BY	ANGULAR ± 1/2°					