

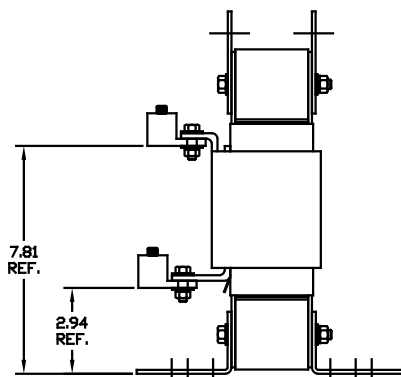
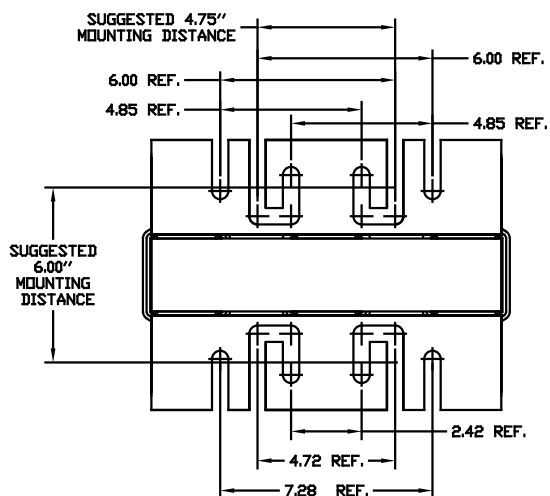
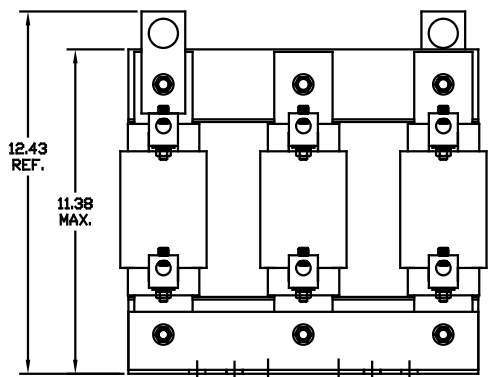


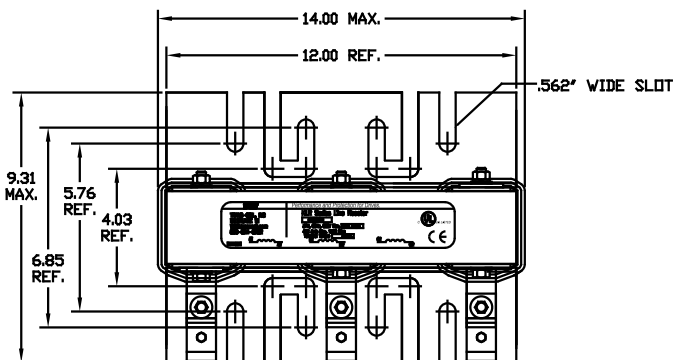

CATALOG NO	VOLTS(V.)	__mH-±10%	__AMPS(A)	APPROX WT-LBS
KLRUL160CPT	24.0	.230	160	89
KLRUL160EPT	28.75	.275	160	89
KLRUL200APT	14.4	.110	200	87
KLRUL200DPT	17.25	.132	200	87

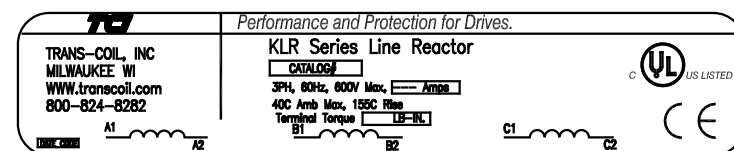

LUG WIRE RANGE 250MCM-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

						TOLERANCES (EXCEPT AS NOTED)			7878 N. 86th STREET MILWAUKEE, WI 53224	
						DECIMAL			KLRUL OPEN, (FRAME L) LINE REACTOR	
						.XX ± .03				
						.XXX± .01				
						FRACTIONAL ± 1/32			DRN. BY DSW DATE 05/12/04 DWG. NO. KLRULOPEN-17DG	
						ANGULAR ± 1/2°				
NO	REVISION	DATE	BY			SCALE TO FIT		APPROV.	B	SHT. 1 OF 1