

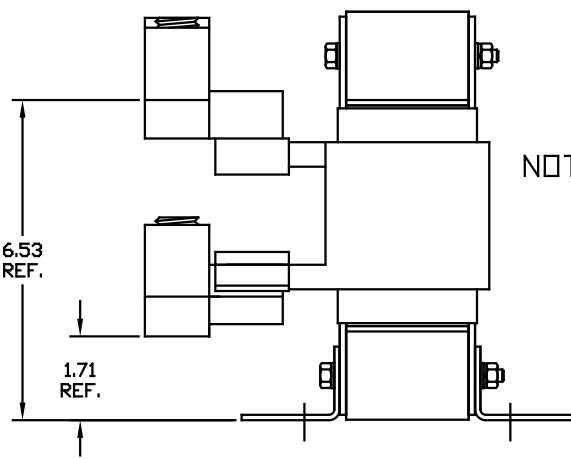
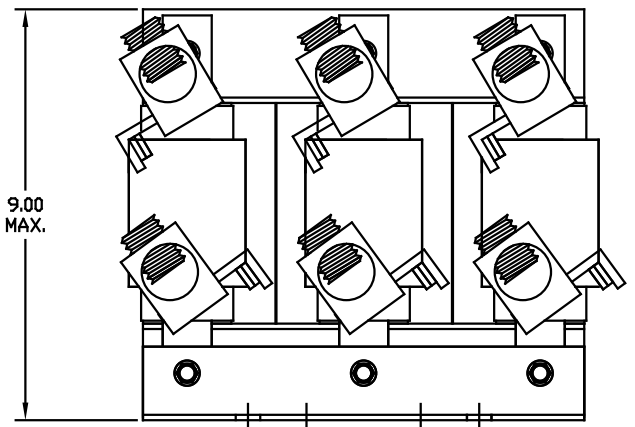


| CATALOG NO | VOLTS(V.) | __mH±10% | __AMPS(A) | APPROX WT-LBS |
|-------------|-----------|----------|-----------|---------------|
| KLRUL250BPT | 7.20 | .044 | 250 | 57 |
| KLRUL250FPT | 8.62 | .053 | 250 | 57 |

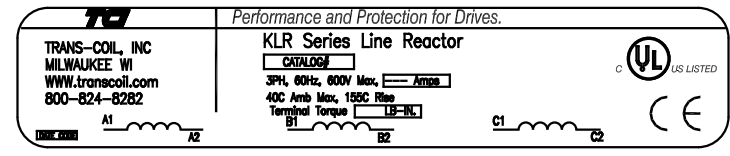

NOTE: LUGS ROTATED TO MEET CLEARANCE (PHASE TO PHASE), AND TO MEET CLEARANCE FROM LUGS TO GROUNDING SURFACE.

LUG WIRE RANGE ONE 600MCM-4
FOR REACTOR. TWO 250MCM-1/0, AL. OR CU.
TIGHTENING TORQUE. 500 LB-IN

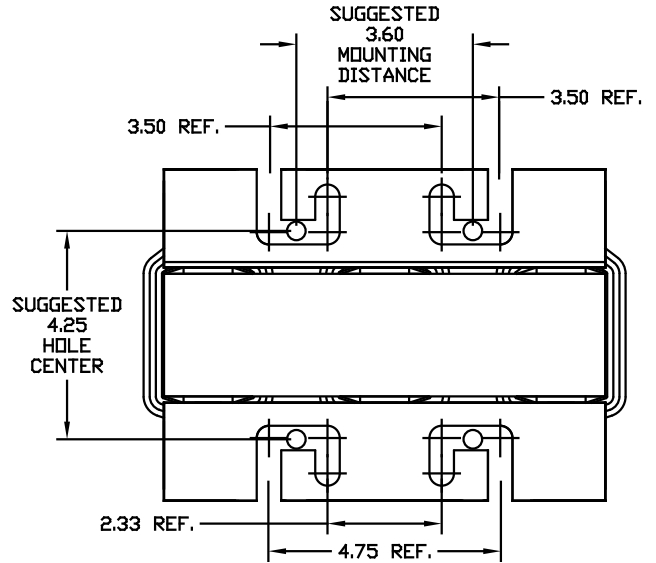

| | | | | | |
|-----|----------|------|----|-----------------------------|---|
| | | | | TOLERANCES EXCEPT AS NOTED: | 7878 N. 86th STREET MILWAUKEE, WI 53224 |
| | | | | DECIMAL | |
| | | | | XX ± .03 | KLRUL OPEN, (FRAME G) LINE REACTOR |
| | | | | .XXX ± .010 | |
| | | | | FRACTIONAL ± 1/16 | DRG. BY DSW DATE 05/12/04 DWG. NO. KLRULOPEN-20DG |
| | | | | ANGULAR ± 1/2° | SCALE 1/2"=1" APPR. SHI. 1 OF 1 |
| NO. | REVISION | DATE | BY | | |