

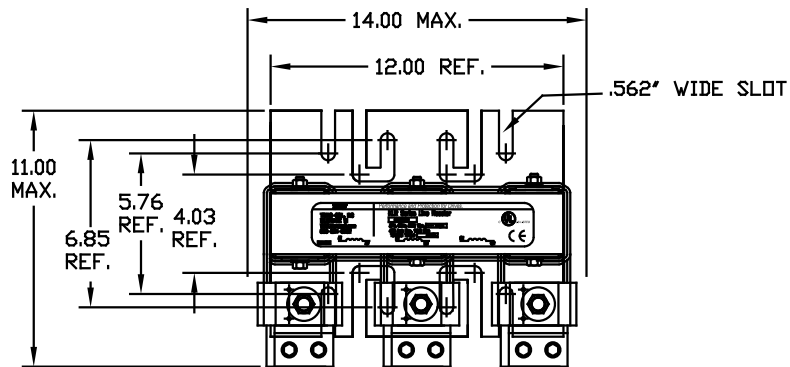
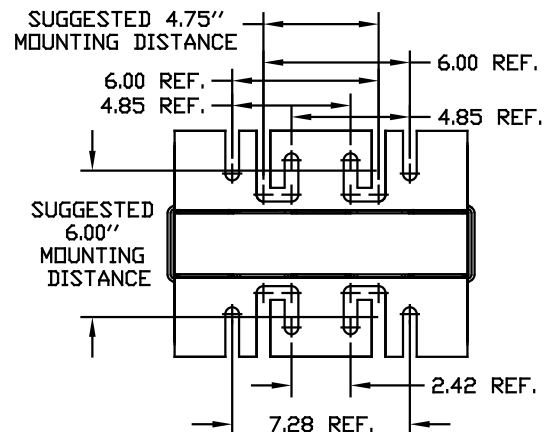



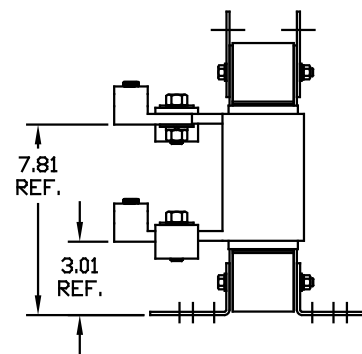

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL420APT	14.40	.053	420	115
KLRUL420BPT	7.20	.026	420	100
KLRUL420DPT	17.24	.063	420	115
KLRUL420FPT	8.62	.031	420	100

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

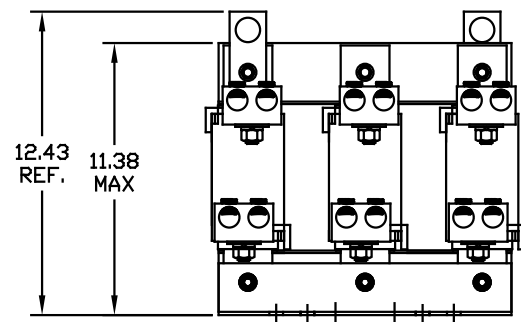

				TOLERANCES EXCEPT AS NOTED	 7878 N. 86th STREET MILWAUKEE, WI 53224
				XX ±.03	
				.XXX±.01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	NO REVISION DATE BY DSW 05/14/04 SCALE TO FIT APPROVA DATE 7878 N. 86th STREET MILWAUKEE, WI 53224 KLRUL OPEN, (FRAME L) LINE REACTOR KLRULOPEN-30DG SHT. 1 OF 1