

CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL750APT	14.4	.029	750	291
KLRUL750CPT	24.0	.049	750	291
KLRUL750DPT	17.24	.035	750	285
KLRUL750EPT	28.74	.059	750	291

LUG WIRE RANGE TWO 800MCM-300MCM, AL. OR CU. FOR REACTOR.  
TIGHTENING TORQUE. 375 LB-IN



**TCI** Performance and Protection for Drives.

TRANS-COIL, INC  
MILWAUKEE WI  
WWW.transcoil.com  
800-824-8282

KDR Drive Reactor  
CATALOG Motor Amps  
3PH, 60Hz, 600V Max, A Max.  
40C Amb Max, 155C Rise  
Terminal Torque LB-IN

UL US LISTED

A1 A2 B1 B2 C1 C2

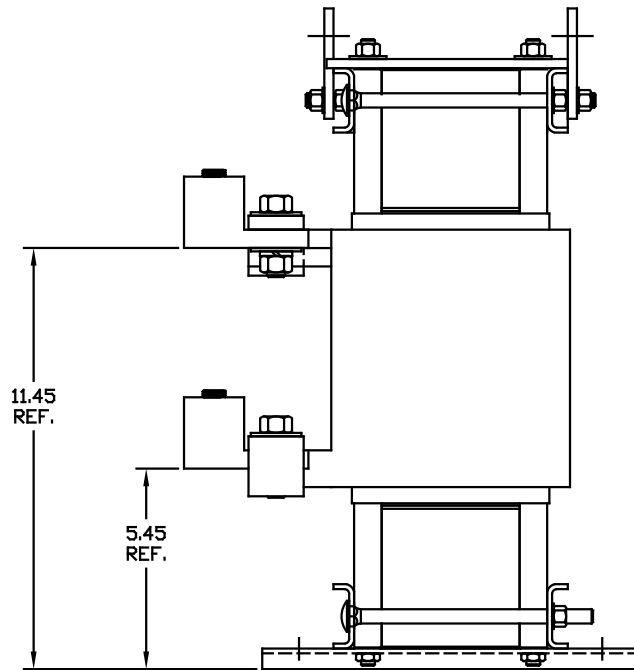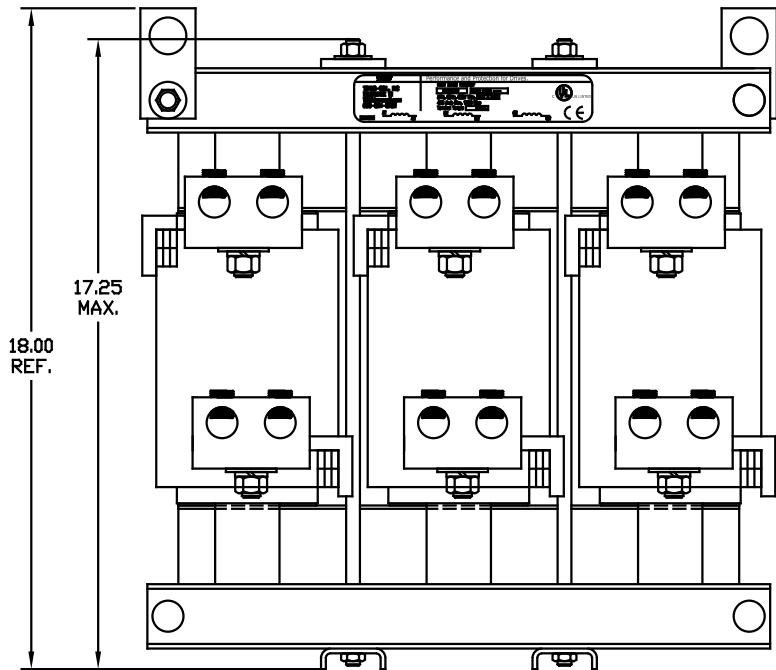

				TOLERANCES EXCEPT AS NOTED:		7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL		
				.XX ± .03		
				.XXX ± .010		
				FRACTIONAL ± 1/16		
				ANGULAR ± 1/2°		
NO	REVISION	DATE	BY	DESIGNER	DATE	<b>KLRUL OPEN, (FRAME X) LINE REACTOR</b> DSW 05/17/04 SCALE 3/8"=1"
				APPROVER	DATE	

KLRULOPEN-40DG SHT.1 OF 1