


CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL600EPT3R	28.74	.073	600	460




LUG WIRE RANGE TWO 600MCM-2, AL. OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN



LABEL PLACED ON FRONT OF CABINET.

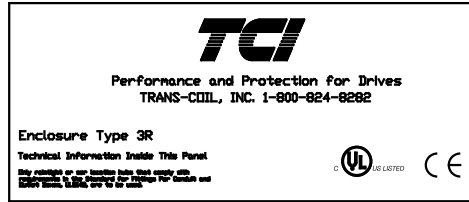

LABEL PLACED ON INSIDE WALL OF CABINET.

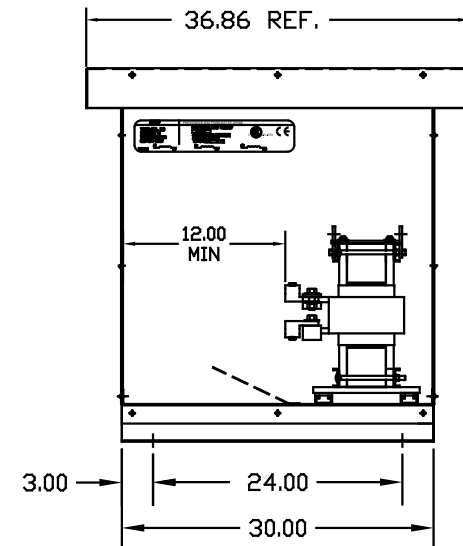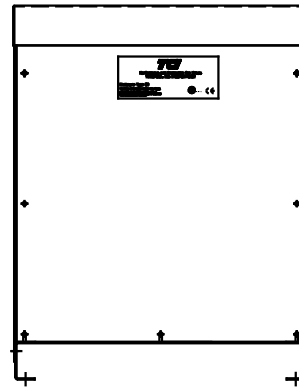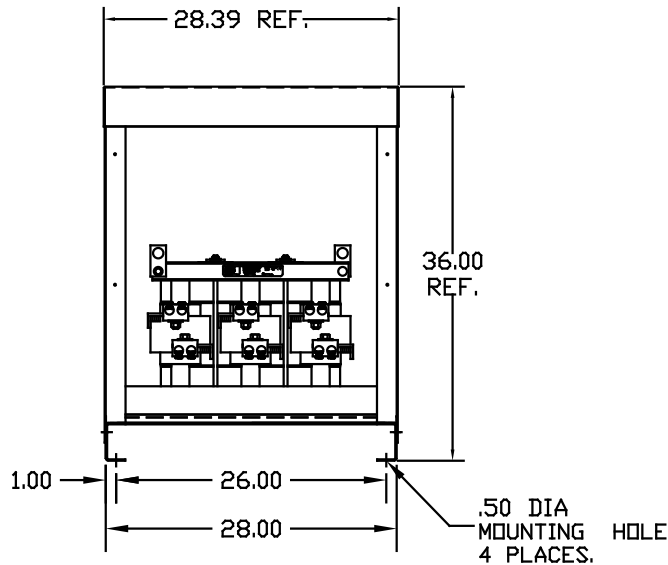

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

				TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°
NO	REVISION	DATE	BY	

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

**KLR FRAME X (ILSCO LUGS)
TYPE 3R ENCLOSURE**

DRN BY **DSW** DATE **09/22/04** DWG. NO. **B KLRXE3R-2DG**
SCALE **TO FIT** APPRVD. **B** SHT. 1 of 1