




SineWave Part Number	Schematic Drawing#	Approx Weight (LBS)
KMG80A00A	24281-3A	174
KMG80A00P	24281-3P	179

HorsePower (HP)	kVar	Max Amps	Voltage (V)	HZ	Phase
60	5	80	480	60	3



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

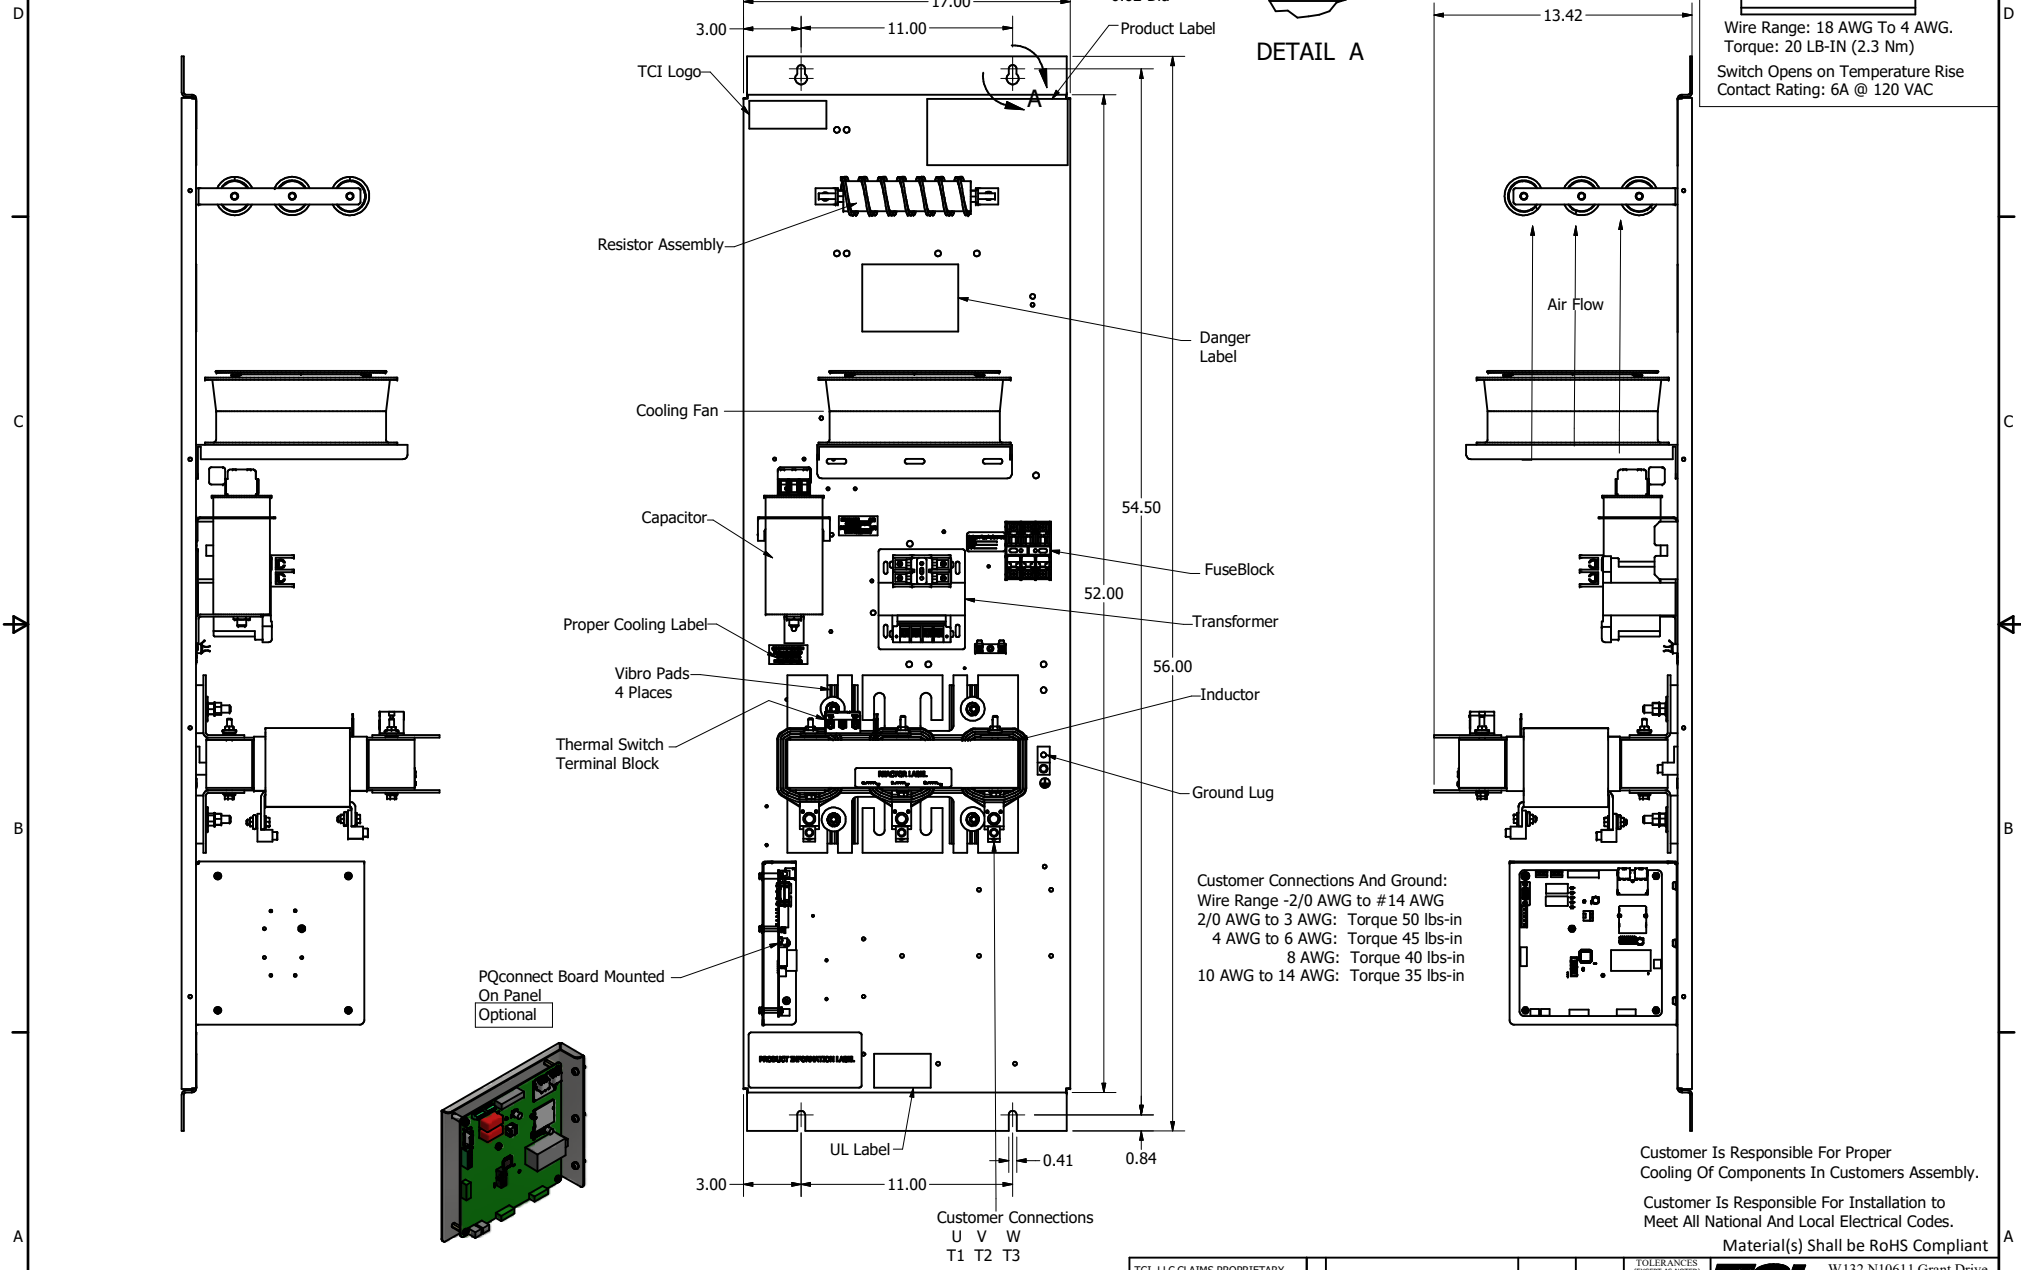

Customer Connections And Ground:
Wire Range -2/0 AWG to #14 AWG
2/0 AWG to 3 AWG: Torque 50 lbs-in
4 AWG to 6 AWG: Torque 45 lbs-in
8 AWG: Torque 40 lbs-in
10 AWG to 14 AWG: Torque 35 lbs-in

Customer Is Responsible For Proper Cooling Of Components In Customers Assembly.

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022 KMG80A00-, SineWave Filter Open Panel, 60HP, 480V DWN BY: DSW DATE: 10/04/2016 104335DG SCALE: 1/5 REVISED: FILE: SHEET 1 OF 1
					DECIMAL	
					.XX ±.25 .XXX ±.10	
					FRACTIONAL	
	B	Add PQconnect Board	6/17/2020	DSW	± 1/16	
	NO	REVISION	DATE	BY	± 1"	