

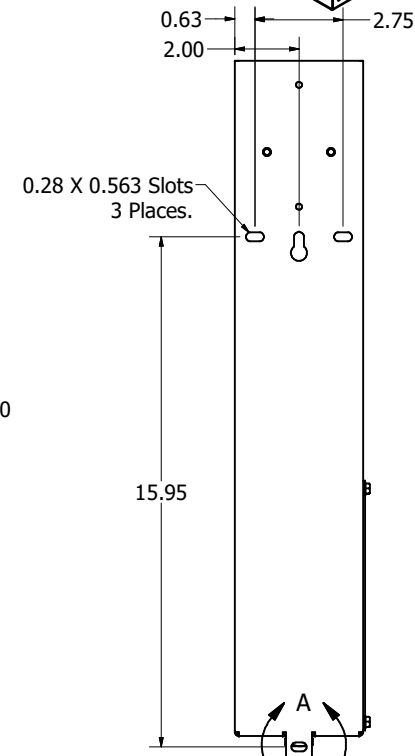
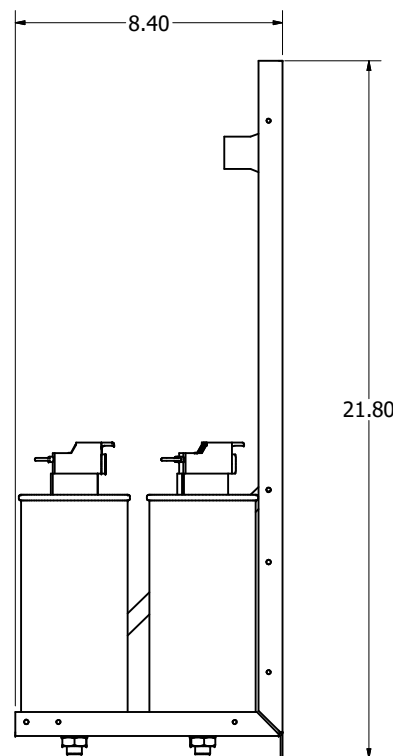
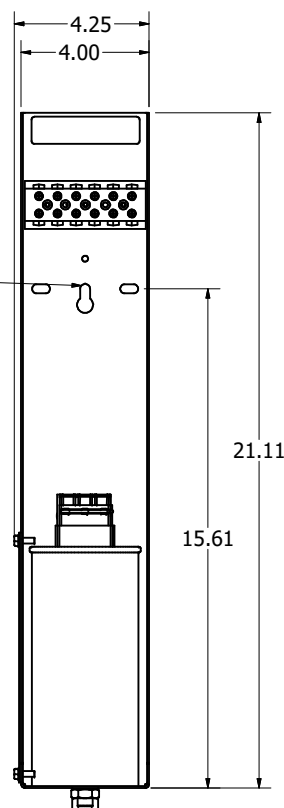



KPCUL020A63, 480V, 20kVar, 125 HP
Approx. Weight: 10 Lbs

Customer Input	
Wire Range	Tightening Torque
1-4	35 In-Lb
6-14	30 In-Lb
16-20	25 In-Lb
22	20 In-Lb



Note: 27908, Manual KPC Installation Guide
MUST SHIP WITH EACH ASSEMBLY.

Customer Is Responsible For Installation
To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIANT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIANT INC. AND ITS SUBSIDIARIES.		DESIGNED BY JRN DATE 10/05/17		DRAWN BY DSW DATE 10/05/17		CHECKED BY JRN DATE 10/05/17		SCALE 1/4"		SHEET NO. 107341DG		SHEET 1 OF 1	
C		7150		Update the Cap Views		7/29/25		DSW							
A				As Designed											
NO		ECO		REVISION											

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Alliant Inc.

KPCUL020A63
20kVar, 125HP, 480V, (Low C)